

# Spark-ignited generator set 125 – 150 kW standby EPA Emissions



## > Specification sheet

**Our energy working for you.™**



### Description

Cummins Power Generation commercial generator sets are fully integrated power generation systems providing optimum performance, reliability and versatility for stationary standby power applications. Codes or standards compliance may not be available with all model configurations – consult factory for availability.



This generator set is designed in facilities certified to ISO 9001 and manufactured in facilities certified to ISO 9001 or ISO 9002.



The Prototype Test Support (PTS) program verifies the performance integrity of the generator set design.



All low voltage models are CSA certified to product class 4215-01.



The generator set is available Listed to UL 2200, Stationary Engine Generator Assemblies. The PowerCommand control is Listed to UL 508 - Category NITW7 for U.S. and Canadian usage.

### U.S. EPA

Engine certified to U.S. EPA SI Stationary Emission Regulation 40 CFR, Part 60.

### Features

**GM heavy-duty gas engine** - Rugged 4-cycle industrial spark-ignited delivers reliable power. The electronic air/fuel ratio control provides optimum engine performance and fast response to load changes.

**Three-Way Catalyst** - Simultaneously converts NO<sub>x</sub>, CO and HC to nitrogen, oxygen, carbon dioxide and water, minimizing the harmful emissions of the generator set.

**Alternator** - Several alternator sizes offer selectable motor starting capability with low reactance 2/3 pitch windings, low waveform distortion with non-linear loads and fault clearing short-circuit capability.

**Control system** - The PowerCommand® electronic control is standard equipment and provides total genset system integration including automatic remote starting/stopping, precise frequency and voltage regulation, alarm and status message display, AmpSentry™ protection, output metering and auto-shutdown at fault detection.

**Cooling system** - Standard cooling package provides reliable running at up to 50 °C (122 °F) ambient temperature.

**Enclosures** - Optional weather protective and sound attenuated enclosures are available.

**NFPA** - The genset accepts full rated load in a single step in accordance with NFPA 110 for Level 1 systems.

**Warranty and service** - Backed by a comprehensive warranty and worldwide distributor network.

Model	Natural gas				Propane				Data sheets	
	Standby rating		Prime rating		Standby rating		Prime rating		60 Hz	50 Hz
	60 Hz kW (kVA)	50 Hz kW (kVA)	60 Hz kW (kVA)	50 Hz kW (kVA)	60 Hz kW (kVA)	50 Hz kW (kVA)	60 Hz kW (kVA)	50 Hz kW (kVA)		
GGLA	125 (156)								D-3388	
GGLB	150 (188)				140 (175)				D-3389	

## Generator set specifications

Governor regulation class	ISO 8528 Part 1 Class G3
Voltage regulation, no load to full load	± 1.0%
Random voltage variation	± 1.0%
Frequency regulation	Isochronous
Random frequency variation	± 0.5%
Radio frequency emissions compliance	IEC 801.2 through IEC 801.5

## Engine specifications

Design	GGLA: Turbocharged, GGLB: Turbocharged and CAC
Bore	108.0 mm (4.25 in)
Stroke	111.0 mm (4.37 in)
Displacement	8.1 L (496.0 in <sup>3</sup> )
Cylinder block	Cast iron, V 8 cylinder
Battery capacity	600 amps minimum at ambient temperature of 0 °C (32 °F)
Battery charging alternator	70 amps
Starting voltage	12 volt, negative ground
Lube oil filter type	Single spin-on canister-combination full flow with bypass
Standard cooling system	50 °C (122 °F) ambient radiator cooling system

## Alternator specifications

Design	Brushless, 4 pole, drip proof, revolving field
Stator	2/3 pitch
Rotor	Direct coupled by a flexible disc
Insulation system	Class H per NEMA MG1-1.65
Standard temperature rise	150 °C (302 °F) standby
Exciter type	Torque match (shunt)
Phase rotation	A (U), B (V), C (W)
Alternator cooling	Direct drive centrifugal blower
AC waveform total harmonic distortion	< 5% total no load to full linear load, < 3% for any single harmonic
Telephone influence factor (TIF)	< 50 per NEMA MG1-22.43
Telephone harmonic factor (THF)	< 3

## Available voltages

Reconnectable	Non-reconnectable	
3-phase	1-phase	3-phase
<ul style="list-style-type: none"> <li>• 120/208</li> <li>• 139/240</li> <li>• 220/380</li> <li>• 240/416</li> <li>• 277/480</li> <li>• 120/240 delta</li> </ul>	<ul style="list-style-type: none"> <li>• 120/240</li> </ul>	<ul style="list-style-type: none"> <li>• 347/600</li> </ul>

Note: Consult factory for other voltages.

## Generator set options and accessories

<b>Engine</b> <ul style="list-style-type: none"> <li>• 120 V 1500 W coolant heaters</li> <li>• 240 V 1500 W coolant heaters</li> </ul> <b>Alternator</b> <ul style="list-style-type: none"> <li>• 105 °C (221 °F) rise alternator</li> <li>• 125 °C (257 °F) rise alternator</li> <li>• 120/240 V, 100 W alternator anti-condensation heater</li> <li>• 12 lead, broad range extended stack (full single phase output)</li> <li>• Single phase (4-lead)</li> <li>• PMG excitation</li> </ul>	<b>Fuel system</b> <ul style="list-style-type: none"> <li>• Natural gas</li> <li>• Natural gas/propane liquid with automatic changeover</li> <li>• Natural gas/propane vapor with automatic changeover</li> <li>• Propane liquid withdrawal</li> <li>• Vapor withdrawal</li> </ul>	<b>Exhaust system</b> <ul style="list-style-type: none"> <li>• Mounted residential grade silencer</li> </ul>	<b>Generator set</b> <ul style="list-style-type: none"> <li>• AC entrance box</li> <li>• Battery</li> <li>• Battery charger</li> <li>• Enclosure: aluminum, steel, weather protective or sound attenuated</li> <li>• Export box packaging</li> <li>• Main line circuit breakers</li> <li>• Remote annunciator panel</li> <li>• Spring isolators</li> <li>• UL 2200 Listed</li> <li>• 2 year standby warranty</li> <li>• 5 year basic power warranty</li> <li>• 5 year comprehensive warranty</li> </ul>
--	--	--	---

Note: Some options may not be available on all models - consult factory for availability.

Our energy working for you.™

[www.cumminspower.com](http://www.cumminspower.com)

©2011 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand, AmpSentry, InPower and "Our energy working for you." are trademarks of Cummins Power Generation. Other company, product or service names may be trademarks or service marks of others. Specifications are subject to change without notice. S-1590d (6/11)



## Control system

PowerCommand PCC2100 - An integrated generator set control system providing isochronous governing, voltage regulation, engine protection and operator interface functions.

- Includes integral AmpSentry protection, which provides a full range of alternator protection functions that are matched to the alternator provided.
- Control function provides battery monitoring and testing features, and smart starting control system.
- Three phase sensing, full wave rectified voltage regulation system, with a PWM output for stable operation with all load types.
- Standard PCCNet interface.
- Suitable for operation in ambient temperatures from -40 °C to +70 °C (-40 °F to +158 °F) and altitudes to 5000 m (13,000 ft).
- Prototype tested; UL, CSA and CE compliant.
- InPower™ PC-based service tool available for detailed diagnostics, setup, data logging and fault simulation.

### AmpSentry AC protection

- AmpSentry Protective Relay – UL-listed
- Over current and short-circuit shutdown
- Over current warning
- Single and three phase fault regulation
- Over and under voltage shutdown
- Over and under frequency shutdown
- Overload warning with alarm contact
- Reverse power and reverse Var shutdown
- Field Overload

### Engine protection

- Overspeed shutdown
- Low oil pressure warning and shutdown
- High coolant temperature warning and shutdown
- Low coolant level warning or shutdown
- Low coolant temperature warning
- High and low battery voltage warning
- Weak battery warning
- Fail to start (overcrank) shutdown
- Fail to crank shutdown
- Redundant start disconnect
- Sensor failure indication

### Operator interface

- Off/manual/auto mode switch
- Manual run/stop switch
- Panel lamp test switch
- Emergency stop switch
- Alpha-numeric display with pushbutton access, for viewing engine and alternator data and providing setup, controls and adjustments including voltage adjustment
- LED lamps indicating genset running, not in auto, common warning, common shutdown
- (5) configurable LED lamps
- LED Bargraph AC data display (optional)

### Alternator data

- Line-to-line and line-to-neutral AC volts
- Three phase AC current
- Frequency
- Total and individual phase kW and kVA

### Engine Data

- DC voltage
- Lube oil pressure
- Coolant temperature

### Other data

- Genset model data
- Start attempts, starts, running hours
- kW hours (total and since reset)
- Fault history
- Load profile (hours less than 30% and hours more than 90% load)
- System data display (optional with network and other PowerCommand gensets or transfer switches)

### Governing

- Digital engine speed control for fixed isochronous frequency regulation

### Voltage regulation

- Integrated digital electronic voltage regulator
- Three phase line-to-neutral sensing
- Configurable torque matching
- PMG (optional)

### Control functions

- Time delay start and cooldown
- Fault simulation (requires InPower)
- Cycle cranking
- Data logging on faults
- (2) configurable customer inputs
- (3) configurable customer outputs
- Remote emergency stop

### Options

- Analog AC Meter Display
- Thermostatically Controlled Space Heater
- Key-type mode switch
- Ground fault module
- Auxiliary relays (3)
- Echelon® LONWORKS® interface
- Modlon Gateway to convert to Modbus (loose)
- PowerCommand iWatch™ web server for remote monitoring and alarm notification (loose)
- PCCNet and Lonworks Digital input and output module(s) and Remote annunciators (loose)



PowerCommand 2100 control operator/display panel

Our energy working for you.™

[www.cumminspower.com](http://www.cumminspower.com)

©2011 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand, AmpSentry, InPower and "Our energy working for you." are trademarks of Cummins Power Generation. Other company, product or service names may be trademarks or service marks of others. Specifications are subject to change without notice. S-1590d (6/11)



## Ratings definitions

### Emergency standby power (ESP):

Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

### Limited-time running power (LTP):



Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.

### Prime power (PRP):

Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

### Base load (continuous) power (COP):

Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

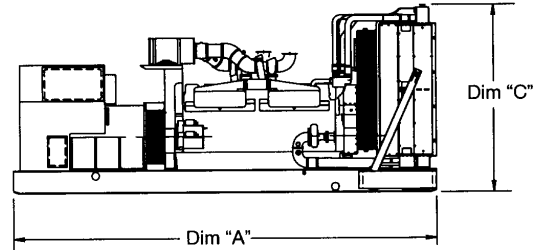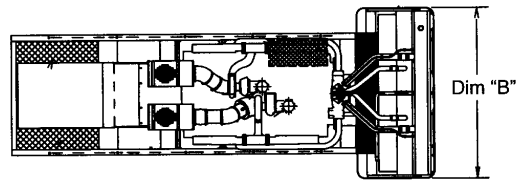

This outline drawing is for reference only. See respective model data sheet for specific model outline drawing number.

*Do not use for installation design*

Model	Dim "A" mm (in.)	Dim "B" mm (in.)	Dim "C" mm (in.)	Set Weight* dry kg (lbs)	Set Weight* wet kg (lbs)
GGLA	2672 (105)	1016 (40.0)	1773 (70.0)	1157 (2550)	1213 (2675)
GGLB	2672 (105)	1016 (40.0)	1773 (70.0)	1157 (2550)	1213 (2675)

\* Weights represent a set with standard features. See outline drawings for weights of other configurations.

Cummins Power Generation  
1400 73<sup>rd</sup> Avenue N.E.  
Minneapolis, MN 55432 USA  
Telephone: 763 574 5000  
Fax: 763 574 5298

Warning: Back feed to a utility system can cause electrocution and/or property damage. Do not connect to any building's electrical system except through an approved device or after building main switch is open.

Our energy working for you.™

[www.cumminspower.com](http://www.cumminspower.com)

©2011 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand, AmpSentry, InPower and "Our energy working for you." are trademarks of Cummins Power Generation. Other company, product or service names may be trademarks or service marks of others. Specifications are subject to change without notice. S-1590d (6/11)

