




Mobile Generator – MMG130 Specifications

ENGINE

- John Deere® PE4045HFG93 - turbocharged, diesel engine
 - Prime - 152 hp @ 1800 rpm
 - Standby - 166 hp @ 1800 rpm
 - 4 cylinder
 - 4.5 L displacement
 - **Interim Tier 4 emissions**
- Steel, single wall fuel tank
 - 342 gal. capacity
 - 44 hr. run time – full load
 - Fuel tank built into skid of generator set
- Fuel consumption at prime:
 - 100% - 7.4 gph (28.0 Lph)
 - 75% - 5.5 gph (20.8 Lph)
 - 50% - 3.7 gph (14.0 Lph)
- Cooling system capable of operating at 120°F ambient
- Low coolant shutdown
- Radiator and oil drains plumbed to exterior
- Rubber vibration dampers isolate engine/generator from frame
- Disposable air filter - paper element
- Air filter restriction indicator mounted on control panel
- 60 Hz engine/generator
- Electronic isochronous governing
- Utilizes DOC / DPF exhaust filter
- Variable Geometry Turbocharger (VGT)

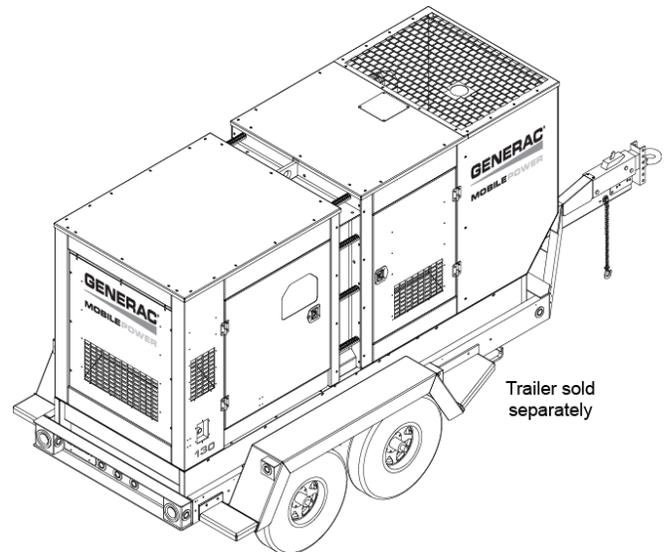

GENERATOR


- Marathon Electric®
 - Brushless
 - 4 pole
 - Class H insulation
- Voltage regulation +/- 1% with Marathon SE350 Voltage Regulator

SYSTEM OUTPUT

- 3 selector switch modes:
 - Single phase – 120 / 240V Zig Zag
 - Three phase – 120 / 208V Low Wye
- Three phase – 277 / 480V High Wye
- 96 kW / 96 kVA – standby, single phase
- 90 kW / 90 kVA – prime, single phase
- 107 kW / 134 kVA – standby, three phase
- 98 kW / 122 kVA – prime, three phase

SYSTEM CONTROLS

- Power Zone™ controller and display
 - Backlit, 800 x 480 pixel resolution color display
 - -40°F to 185°F operating temperature range
 - Automatic coarse voltage adjustment
 - Integrated fine voltage adjustment
 - PLC functionality
- Push buttons for easy operation
 - Manual or Auto Start
 - Engine Start
 - Engine Stop/Reset
 - Alarm Mute
 - Operator Screens
 - ◆ Home
 - ◆ Engine
 - ◆ Generator
 - ◆ Voltage Adjust
 - Scrolling Arrows for Diagnostic Information
 - ◆ Engine diagnostic display
 - Oil pressure
 - Engine temperature
 - Fuel level
 - Battery
 - Aftertreatment inlet/outlet temperature
 - Ash/soot levels
 - ◆ Generator diagnostic display
 - System kW output display
 - Line output & frequency display
 - ◆ Alarms
 - Warning
 - Shutdown
 - Electrical Trip
 - Engine
 - ◆ Alarm list – warnings / shutdowns 250 event history log – date/time stamp
 - Fuel level: warning – 15%; shutdown – 5%
 - Overspeed protection: shutdown – 115%
 - Oil pressure: warning – 25 psi; shutdown – 20 psi
 - Coolant temperature: warning – 220°F; shutdown – 230°F
 - Battery voltage: over – 15VDC; under – 11VDC
 - Generator over voltage: warning – 110%; electrical trip – 111%
 - Generator under voltage: warning – 87%; electrical trip – 86%
 - Generator over frequency: warning – 105%; electrical trip – 110%
 - Generator under frequency: warning – 95%; electrical trip – 90%
 -
 - ◆ Inputs/Outputs
 - ◆ Auto Schedule
 - ◆ Status
 - Configuration of controller, firmware and connections

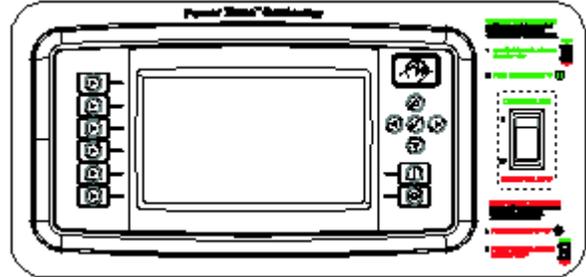

ELECTRICAL CONTROLS

- Remote start / stop contacts located next to lug box
- Lockable control box door with diagnostics window
- Lockable lug box with safety switch
 - Trips main breaker when lug door is opened
 - Disables voltage regulator
- Cable entry guides to the lug box
 - Restricts access of foreign objects
- Output ground connection lug inside lug box
- 450A main breaker with shunt trip
- Convenience receptacles with individual breakers (restricted use in high wye mode)
 - (2) 120V 20 Amp GFCI duplex outlets (Nema 5-20R type)
 - (3) 125 / 250V 50 Amp, 3 pole, 4 wire twistlock (Non-Nema 6369)
- Panel mounted rheostat for voltage adjustment - +/- 10%
- 1000 CCA wet cell battery

ENCLOSURE

- Generac Mobile Power decals
- Aluminum, sound attenuated enclosure
 - UV & fade resistant, high temperature cured, white polyester powder paint
 - Insulated and baffled
 - 68 dB(A) at 23 feet – prime power
- Fully lockable enclosure including doors and fuel fill
- Stainless steel hinges on doors
- Emergency stop switch located on outside of enclosure
- Central lifting point
- Multi-lingual operating/safety decals
- Document holder with operating manual including AC/DC wiring diagrams

TRAILER

- DOT approved tail, side, brake, and directional lights
 - Recessed rear lights
- Transportation tie downs
- Safety chains with spring loaded safety hooks
- 3" lunette ring hitch
- (2) 6000 lb. axles with surge brakes
- 5000 lb. tongue jack with footplate
- 7.50x16E-6-W tubeless tires – 10 ply

WEIGHTS & DIMENSIONS

Skid mounted

- Dry weight: 5444 lbs (2469 kg)
- Operating weight: 7929 lbs (3596 kg)
- 144 x 50 x 77 in
(3.66 x 1.27 x 1.95 m)

Trailer mounted

- Dry weight: 6840 lbs (3102 kg)
- Operating weight: 9325 lbs (4230 kg)
- 210 x 86 x 93 in
(5.33 x 2.18 x 2.36 m)

WARRANTY

- Engine and generator covered under OEM warranty – consult factory for details.

CERTIFICATIONS

- CSA pending

MMG130 Options

ENGINE OPTIONS

- ◆ In-line engine block heater (Kim Hotstart)
- ◆ Fuel transfer pump

ELECTRICAL CONTROLS OPTIONS

- ◆ Battery disconnect
- ◆ Battery charger – 2A trickle

GENERATOR OPTIONS

- ◆ SUPERSTART Generator - motor starting applications
 - 108 kW / 108 kVA – standby, single phase
 - 98 kW / 98 kVA – prime, single phase
 - 110 kW / 138 kVA – standby, three phase
 - 100 kW / 125 kVA – prime, three phase

VOLTAGE OUTPUT OPTIONS

- ◆ 4 position phase switch
 - Single phase – 120 / 240V Zig Zag
 - Three phase – 120 / 208V Low Wye
 - Three phase – 277 / 480V High Wye
 - Three phase – 120 / 240V Delta
- ◆ Dedicated voltage configurations
- ◆ Buck Transformer kit - Provides 120V at GFCI outlets when in 277/480V
- ◆ Cam locks

SYSTEM CONTROLS OPTIONS

- ◆ Auxiliary strobe/audible indication for soft & hard alarm conditions

COOLANT OPTIONS

60/40 Coolant - cold weather applications

ENCLOSURE OPTIONS

- ◆ Fire extinguisher
- ◆ Interior cabinet light
- ◆ Control panel light

FUEL TANK OPTIONS

- ◆ 61 hr. single wall fuel tank
- ◆ 36 hr. double wall fuel tank

MMG130 Generac Specifications Continued:

- ◆ 120% Containment

TRAILER OPTIONS

- ◆ Tandem axle trailer w/ electric brakes
- ◆ 6 pin or 7 spade electrical connectors
- ◆ Spare tire/wheel kit

HITCH OPTIONS

- ◆ 2 5/16" ball



Turnkey Industries is an expert in the field of purchasing and selling pre-owned industrial generators. We offer many different brands, sizes, and capacities of generators. We fulfill orders across the country and beyond, and our elaborate preparatory processes ensure that our equipment is ready for immediate usage on arrival.

[See All Inventory](#)



**Immediate
Availability**



**Worldwide
Delivery**



**Low Hour
Generator Sets**

Contact Us



sales@turnkey-industries.com



713-823-0890



Turnkey Industries, LLC
P.O. Box 3876 Humble, TX 77347

