



GILLETTE GENERATORS

LIQUID COOLED NAT. GAS ENGINE GENERATOR SET

60 HZ MODEL

SP-5000

Model	STANDBY 120°C RISE		
	HZ	LPG	N.G.
SP-5000-60 HERTZ	60	300	500



All generator sets are USA prototype built and thoroughly tested. Production models are USA factory built and 100% load tested.



UL2200, UL1446, UL508, UL142, UL498



NFPA 110, 99, 70, 37

All generator sets meet NFPA-110 Level 1, when equipped with the necessary accessories and installed per NFPA standards.



NEC 700, 701, 702, 708



NEMA ICS10, MG1, ICS6, AB1




ANSI C62.41, 27, 59, 32, 480, 40Q, 81U, 360-05



ASCE 7-22

All generator sets meet 200 MPH rating.

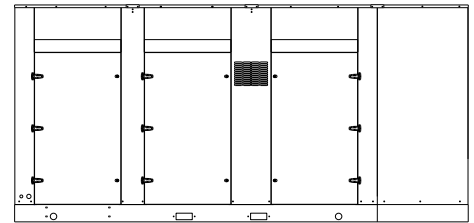

“LEVEL 2” HOUSED GEN-SET

Full aluminum weather protection and superior sound attenuation for specific low noise applications. Critical grade muffler is standard.



EPA 40CFR Part 60, 1048, 1054, 1065, 1068

GENERATOR RATINGS					LIQUID PROPANE GAS FUEL		NATURAL GAS FUEL	
GENERATOR MODEL	VOLTAGE		PH	HZ	120°C RISE STANDBY RATING		120°C RISE STANDBY RATING	
	L-N	L-L			KW/KVA	AMP	KW/KVA	AMP
SP-5000-3-2	120	208	3	60	300/400	1042	500/625	1736
SP-5000-3-3	120	240	3	60	300/400	903	500/625	1505
SP-5000-3-4	277	480	3	60	300/400	451	500/625	752
SP-5000-3-5	127	220	3	60	300/400	985	500/625	1642
SP-5000-3-16	346	600	3	60	300/400	361	500/625	602

RATINGS: All three phase gen-sets are 12 lead windings, rated at .8 power factor. 120°C “STANDBY RATINGS” are strictly for gen-sets that are used for back-up emergency power to a failed normal utility power source. This standby rating allows varying loads, with no overload capability, for the entire duration of utility power outage. All gen-set power ratings are based on temperature rise measured by resistance method as defined by MIL-STD 705C and IEEE STD 115, METHOD 6.4.4. All generators have class H (180°C) insulation system on both rotor and stator windings. All factory tests and KW/KVA charts shown above are based on 120°C (standby) R/R winding temperature, within a maximum 40°C ambient condition. Generators operated at standby power ratings must not exceed the temperature rise limitation for class H insulation system, as specified in NEMA MG1-22.40. Specifications & ratings are subject to change without prior notice.

APPLICATION AND ENGINEERING DATA FOR MODEL SP-5000-60 HZ

GENERATOR SPECIFICATIONS

Manufacturer..... Stamford Electric Generators
Model & Type..... HCI534E-311, 4 Pole, 12 Lead, Three Phase
..... HCI534D-311, 4 Pole, 12 Lead, 480V, Three Phase
..... HCI534D-17, 4 Pole, 6 Lead, 600V, Three Phase
Exciter..... Brushless, shunt excited
Voltage Regulator..... Solid State, HZ/Volts
Voltage Regulation..... ½%, No load to full load
Frequency..... Field convertible, 60 HZ to 50 HZ
Frequency Regulation..... ½% (½ cycle, no load to full load)
Unbalanced Load Capability..... 100% of standby amps
Total Stator and Load Insulation..... Class H, 180°C
Temperature Rise..... 120°C R/R, standby rating @ 40°C amb.
3 Ø Motor Starting @ 30% Voltage Dip (208-240V) .. 1340 kVA
3 Ø Motor Starting @ 30% Voltage Dip (480V)..... 1750 kVA
3 Ø Motor Starting @ 30% Voltage Dip (600V)..... 1520 kVA
Bearing..... 1, Pre-lubed and sealed
Coupling..... Direct flexible disc
Total Harmonic Distortion..... Max 3 | % (MIL-STD705B)
Telephone Interference Factor..... Max 50 (NEMA MG1-22)
Deviation Factor..... Max 5% (MIL-STD 405B)
Ltd. Warranty Period..... 24 Months from date of start-up or
..... 1000 hours use, first to occur.

GENERATOR FEATURES

- World Renown Stamford Electric Generator having UL-1446 certification on full amortisseur windings.
- Full generator protection with **Deep Sea 7420** controller, having UL-508 certification.
- Automatic voltage regulator with over-excitation, under-frequency compensation, under-speed protection, and EMI filtering. Entire solid-state board is encapsulated for moisture protection.
- Generator power ratings are based on temperature rise, measured by resistance method, as defined in MIL-STD 705C and IEEE STD 115, Method 6.4.4.
- Power ratings will not exceed temperature rise limitation for class H insulation as per NEMA MG1-22.40.
- Insulation resistance to ground, exceeds 1.5 meg-ohm.
- Stator receives 2000 V. hi-potential test on main windings, and rotor windings receive a 1500 V. hi-potential test, as per MIL-STD 705B.
- Complete engine-generator torsional acceptance, confirmed during initial prototype testing.
- Full load testing on all engine-generator sets, before shipping.
- Self ventilating and drip-proof & revolving field design

ENGINE SPECIFICATIONS AND APPLICATIONS DATA

ENGINE

Manufacturer..... Power Solutions Inc. (PSI)
Model and Type..... Heavy Duty, 21.9LTCAC HO, 4 cycle
Aspiration..... Turbocharged & Charge Air Cooled
Cylinder Arrangement..... 12 Cylinders, Vee
Displacement Cu. In. (Liters)..... 1336 (21.9)
Bore & Stroke In. (Cm.)..... 5.0 x 5.6 (128 x 142)
Compression Ratio..... 10.5:1
Main Bearings & Style..... 14, Precision Half-Shell
Cylinder Head..... Cast Iron
Pistons..... Cast Aluminum
Crankshaft..... Forged Steel
Exhaust Valve..... Inconel, A193
Governor..... Electronic
Frequency Reg. (no load-full load)..... Isochronous
Frequency Reg. (steady state)..... ± 1/4%
Air Cleaner..... Dry, Replaceable Cartridge
Engine Speed..... 1800
Piston Speed, ft/min (m./min)..... 1677 (510)
Max Power, bhp (kwm) Standby/LPG..... 472 (352)
Max Power, bhp (kwm) Standby/NG..... 764 (570)
Ltd. Warranty Period..... 12 Months or 2000 hrs., first to occur

FUEL SYSTEM

Type..... LPG or NAT. GAS, Vapor Withdrawal
Fuel Pressure (kpa), in. H₂O*..... (2.74 -3.48), 11"-14"
Secondary Fuel Regulator..... NG or LPG Vapor System
Auto Fuel Lock-Off Solenoid..... Standard on all sets
Fuel Supply Inlet Line..... (2) 2" NPTF

FUEL CONSUMPTION

LP GAS: FT ³ /HR (M ³ /HR)	STANDBY
100% LOAD	1601 (45.3)
75% LOAD	1201 (34.0)
50% LOAD	809 (22.9)
LPG = 2500 BTU X FT ³ /HR = Total BTU/HR LPG Conversion: 8.50 FT ³ = 1 LB. : 36.4 FT ³ = 1 GAL.	

NAT. GAS: FT ³ /HR (M ³ /HR)	STANDBY
100% LOAD	5346 (151)
75% LOAD	4350 (123.2)
50% LOAD	3300 (93.4)
NG = 1000 BTU X FT ³ /HR = Total BTU/HR	

OIL SYSTEM

Type..... Full Pressure
Oil Pan Capacity qt. (L)..... 42.3 (40.0)
Oil Pan Cap. W/ filter qt. (L)..... 49.1 (47.1)
Oil Filter..... 2, Replaceable Spin-On

ELECTRICAL SYSTEM

Ignition System..... Electronic
Eng. Alternator/Starter: 24 VDC, negative ground, 45 amp/hr.

Recommended battery to -18°C (0° F): ... (2) 12 VDC, BCI# 31, Max. Dimensions: 14"lg x 6 3/4" wi x 10" hi, with standard round posts. Min output 1000 CCA. Battery tray (max. dim. at 15"lg x 7"wi). This model has (2) battery trays, (2) hold down straps, (2) sets of battery cables, and (1) battery charger. Installation of (2) 12VDC starting batteries connected in series for 24VDC output is required, with possible higher AMP/HR rating, as described above, if the normal environment temperature averages -13° F (-25°C) or cooler.

APPLICATION AND ENGINEERING DATA FOR MODEL SP-5000-60 HZ

COOLING SYSTEM

Type of System.....	Pressurized, closed recovery
Coolant Pump	Pre-lubricated, self-sealing
Cooling Fan Type (no. of blades).....	Pusher (8)
Fan Diameter inches (mm)	52" (1321)
Ambient Capacity of Radiator °F (°C).....	125 (51.6)
Engine Jacket Coolant Capacity Gal (L)	14 (53.0)
Radiator Coolant Capacity Gal. (L).....	50 (189)
Maximum Restriction of Cooling Air Intake and discharge side of radiator in. H ₂ O (kpa)	0.5 (.125)
Water Pump Capacity gpm (L/min)	174 (660)
Heat Reject Coolant: Btu/min (kw).....	25,760 (453)
Low Radiator Coolant Level Shutdown.....	Standard
Note: Coolant temp. shut-down switch setting at 230°F (110°C) with 50/50 (water/antifreeze) mix.	

AIR REQUIREMENTS

Combustion Air, cfm (m ³ /min)	1027 (29.1)
Radiator Air Flow cfm (m ³ /min)	39,995 (1133)
Heat Rejected to Ambient:	
Engine: kw (btu/min).....	66 (3765)
Alternator: kw (btu/min)	27 (1580)

EXHAUST SYSTEM

Exhaust Outlet Size	(2) 5"
Max. Back Pressure, in. hg (KPA)	3.0 (10.2)
Exhaust Flow, at rated kw: cfm (m ³ /min).....	3179 (89.8)
Exhaust Temp., at rated kw: °F (°C)	1382 (750)
Engines are EPA certified for Natural Gas.	

SOUND LEVELS MEASURED IN dB(A)

	Open Set	Level 2 Encl.
Level 2, Critical Silencer	97	82
Level 3, Hospital Silencer.....		76

Note: Open sets (no enclosure) has (2) optional silencer system choices due to unknown job-site applications. Level 2 enclosure has installed critical silencer with upgrade to hospital silencer. Sound tests are averaged from several test points and taken at 23 ft. (7 m) from source of noise at normal operation.

DERATE GENERATOR FOR ALTITUDE

3% per 1000 ft.(305m) above 3000 ft. (914m) from sea level

DERATE GENERATOR FOR TEMPERATURE

2% per 10°F(5.6°C) above 104°F (40°C)

DIMENSIONS AND WEIGHTS

	Open Set	Level 2 Enclosure
Length in (cm)	168 (427)	216 (548)
Width in (cm).....	82 (208)	82 (208)
Height in (cm).....	92 (234)	100 (254)
3 Ø Net Weight lbs (kg).....	10225 (4638)	12725 (5772)
3 Ø Ship Weight lbs (kg).....	10625 (4820)	13125 (5954)

DEEP SEA 7420 DIGITAL MICROPROCESSOR CONTROLLER



DEEP SEA 7420

The 7420 controller is an auto start mains (utility) failure module for single gen-set applications. This controller includes a backlit LCD display which continuously displays the status of the engine and generator at all times.

The 7420 controller will also monitor speed, frequency, voltage, current, oil pressure, coolant temp., and fuel levels. These modules have been designed to display warning and shut down status. It also includes: (11) configurable inputs • (8) configurable outputs • voltage monitoring • mains (utility) failure detection.

- (250) event logs
- configurable timers
- automatic shutdown or warning during fault detection
- remote start (on load)
- engine preheat
- advanced metering capability
- hour meter
- text LCD displays
- protected solid state outputs
- test buttons for: stop/reset
- manual mode
- auto mode
- lamp test
- start button
- power monitoring (kWh, kVAh, kVAh, kVAh)

This controller includes expansion features including RS232, RS484 (using MODBUS-RTU/TCP), direct USB connection with PC, expansion optioned using DSENet for remote annunciation and remote relay interfacing for a distance of up to 3300FT. The controller software is freely downloadable from the internet and allows monitoring with direct USB cable, LAN, or by internet via the built in web interface.

LOW LOAD CONDITIONS: Operation of PSI HD engines at low-load conditions should be limited to no more than one (1) hour per twenty-four (24) hour period. If the application requires extended time at light loads, it is recommended that the engine load be increased to at least 70% of mechanical rating for a minimum of two (2) hours per fifty (50) hours of low-load operation. Piston sealing rings rely on adequate cylinder firing pressure and temperature to seal the combustion chamber and prevent excessive engine oil from entering the power cylinder. Under low loads these rings will not seal properly, resulting in oil being burned in the combustion chamber and carbon deposits on pistons and valves. This mechanism is well-documented in reciprocating engines of all fuel types and is often referred to as "wet-stacking."

STANDARD FEATURES FOR MODEL SP-5000-60 HZ

STANDARD FEATURES

CONTROL PANEL:

Deep Sea 7420 digital microprocessor with logic allows programming in the field. Controller has:

- STOP-MANUAL-AUTO modes and automatic engine shutdowns, signaled by full text LCD indicators:
- Low oil pressure
- High engine temp
- Low Radiator Level
- Three auxiliary alarms
- Battery fail alarm
- Engine fail to start
- Engine over speed
- Engine under speed
- Over & under voltage

Also included is tamper-proof engine hour meter

ENGINE:

Full flow oil filter • Air filter • Oil pump • Solenoid type starter motor • Hi-temp radiator • Jacket water pump • Thermostat • Pusher fan and guard • Exhaust manifold • 24 VDC battery charging alternator • Flexible exhaust connector • "Isochronous" duty, electronic governor • Secondary dry fuel regulator • Dry fuel lock-off solenoid • Vibration isolators • Closed coolant recovery system with 50/50 water to anti-freeze mixture • flexible oil & radiator drain hose.

Design & specifications subject to change without prior notice. Dimensions shown are approximate. Contact Gillette for certified drawings. DO NOT USE DIMENSIONS FOR INSTALLATION PURPOSES.

AC GENERATOR SYSTEM:

AC generator • Shunt excited • Brushless design • Circuit Breaker installed and wired to gen-set • Direct connection to engine with flex disc • Class H, 180°C insulation • Self ventilated • Drip proof construction • UL Certified

VOLTAGE REGULATOR:





½% Voltage regulation • EMI filter • Under-speed protection • Over-excitation protection • total encapsulation

DC ELECTRICAL SYSTEM:

Battery tray • Battery cables • Battery hold down straps • 2-stage battery float charger with maintaining & recharging automatic charge stages

WEATHER/SOUND PROOF ALUMINUM HOUSING CORROSION RESISTANT PROTECTION CONSISTING OF:

- 9 Heated and Agitated Wash Stages
- Zinc Phosphate Etching-coating Stage
- Final Baked On Enamel Powder Coat
- 18/8 Stainless Steel Hardware

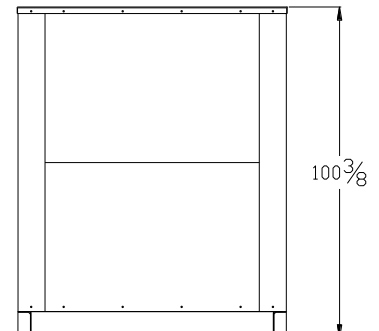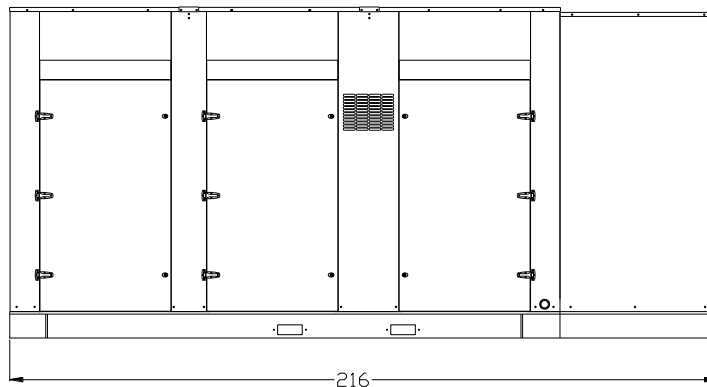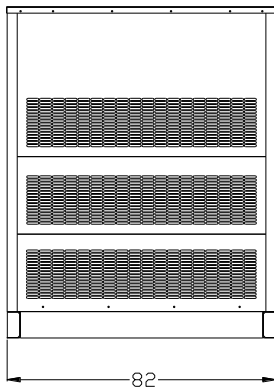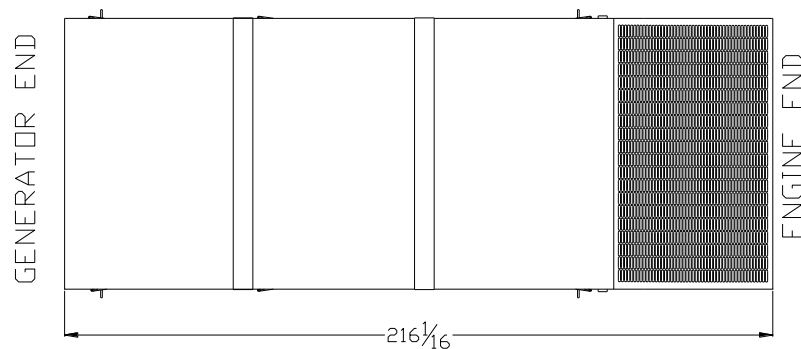



HEAVY-DUTY

21.9L ENGINE

INDUSTRIAL STATIONARY

Product Overview

The PSI HD 21.9L is a U.S. EPA-certified natural gas and propane engine developed from the block up to be a reliable and durable power unit. Built upon a proven marine-diesel grade block, the 12-cylinder in-line, turbocharged and after-cooled engine features replaceable wet liners and water-cooled exhaust.

Superior engine performance is provided by an ECU that integrates and coordinates all critical functions including: Governor, Variable Ignition Timing, Air Fuel Ratio Control, Knock Suppression and Engine Protection.

The PSI HD product lineup has six models with displacements of 8.1L, 11.1L, 14.6L, 18.3L and 21.9L. These engines are an extension of the PSI product line, which is based upon blocks from 650cc to 8.8L. All PSI engines feature the same fuel systems and controls, simplifying your application development and support.



FEATURES

- U.S. EPA-Certified and CARB-Compliant
- Dual Fuel with Automatic Change-Over
- 50C Ambient Cooling Capacity
- 3-Way Catalytic Converter
- Air Filtration
- UL2200-Compliant or Listed Components
- MasterTrak Telematics service (included for 1 year)

**MAXIMUM
PERFORMANCE
NO COMPROMISES**

POWER & PERFORMANCE • EMISSION-CERTIFIED • FUEL-FLEXIBLE



HEAVY-DUTY


21.9L ENGINE ENGINEERING DATA

21.9L Industrial Stationary Engine

Displacement	1,338 cid	21,930 cc
Compression Ratio	10.5:1	
Bore & Stroke	5.04 in x 5.59 in	128 mm x 142 mm
kWe	430@1,800 rpm (Natural Gas)	350@1,500 rpm (Natural Gas)
Emission-Certified	EPA, CARB – Industrial Stationary	
Fuel Types	Natural Gas / Propane	

GENERAL DATA

- Water-cooled, turbo-charged, air-to-air inter-cooled, stoichiometric, replaceable wet cylinder liners
- Cast iron block & heads, 10.5:1 compression ratio, overhead valve/2V configuration
- Crankshaft gear-driven oil system with cartridge-type filter, belt-driven centrifugal water pump
- Full ECU engine control including: coil-on-plug variable timing ignition, electronic governor and fuel-air ratio control
- Engine protection for oil pressure, coolant level, coolant temperature, fuel pressure, over-speed
- Complete fuel system for single fuel (NG/LP) operation with closed-loop control
- Alternator (45A/24VDC)
- Starter (24VDC)
- CANBUS J1939 interface

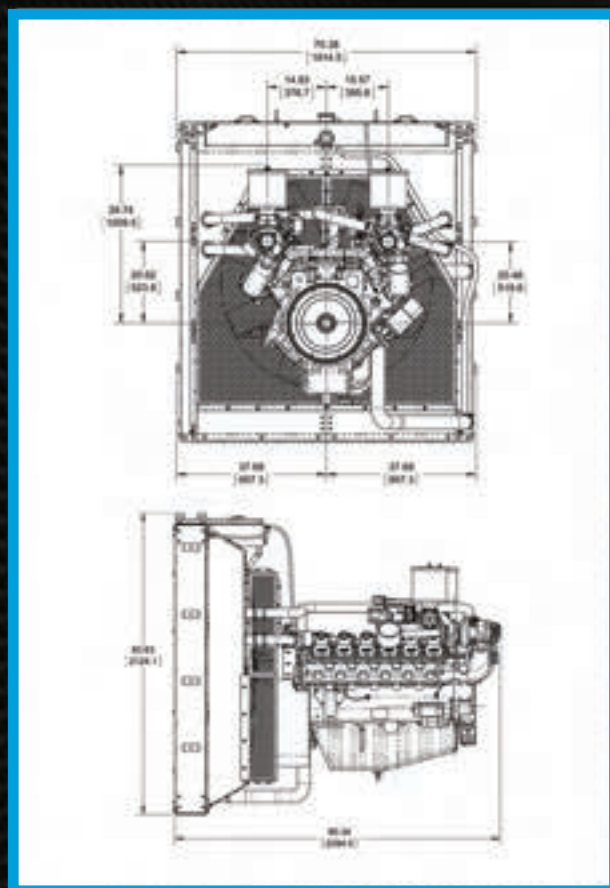

Power shown is gross engine power and has been corrected to SAE J1995. Actual installed power levels may vary depending on the application and OEM supplied components.

Information may vary with application. All specifications listed are based on the latest product information available at the time of publication. The right is reserved to make changes at any time without notice.

201 Mittel Drive, Wood Dale, IL 60191
T: 630-350-9400 F: 630-350-9900
www.psiengines.com

21.9L



ENERGY

[Stoic.]

561000xx

Rev: PRELIM

General Engine Data⁵

Type	V-type 4 cycle				Flywheel housing		SAE No.1				
Number of cylinders	12				Flywheel		No. 14				
Aspiration	Turbo Charge Air Cooled				Dry Weight (Fan to Flywheel)		lb	kg	3630	1650	
Firing Order	1-12-5-8-3-10-6-7-2-11-4-9				Wet Weight (Fan to Flywheel)		lb	kg	5227	2376	
Rotation Viewed from Flywheel	Counter Clockwise				CG From Flywheel Housing Rear Face		in	mm	23.7	602	
Bore	in	mm	5.0	128	CG Above Crank Centerline		in	mm	7.2	182	
Stroke	in	mm	5.6	142	Max Bending Moment @ Rear of Block		lb/ft	N m	8130	6000	
Displacement	in ³	L	1336	21.9	Oil Specification		SAE 15W-40 Low Ash Gas engine oil (.25-.5% by wt), API CD/CF or higher				
Compression Ratio	10.5										
Exhaust Manifold Type	Water Cooled Manifold				Engine Oil Capacity ⁸		Min	qts	L	35.0	33.0
Turbo Exhaust Outlet Pipe Size	in	mm	2.5	65			Max	qts	L	42.4	40.0
Catalyst Inlet Size	in	mm	3.5	89	ECU Oil Pressure Warning ⁶		psi	kPa	30	207	
Catalyst Dp	in-H ₂ O	kPa	33.4	8.3	ECU Oil Pressure Shut Down ⁶		psi	kPa	25	172	
Maximum Allowable Exhaust Back Pressure	in-Hg	kPa	3.0	10.2	Oil Pressure at 1000 rpm (Idle)		Min	psi	kPa	13	90
Maximum Fuel System Pressure	psi	kPag	1.0	6.9			Max	psi	kPa	44	300
Maximum Operating pressure to EPR	in-H ₂ O	kPa	11.0	2.7	Max Allowable Oil Temperature		°F	°C	250	121	
Minimum Operating pressure to EPR	in-H ₂ O	kPa	7.0	1.7	Coolant Capacity (Engine only)		gal	L	11.6	44	
Minimum Gas Supply Pipe Size ⁵	2 x 2" NPT				Coolant Capacity (Radiator only)		gal	L	38.6	146	
Maximum Pressure Drop Across CAC	psi	kPa	1.5	10.5	Radiator Weight (Dry)		lb	kg	1597	726	
Maximum Allowable Intake Restriction	Clean Air Filter	in-H ₂ O	kPa	5.0	1.2	Standard Thermostat Range					
	Dirty Air Filter	in-H ₂ O	kPa	15.0	3.7	Normal Operation Temperature ⁹					
Spark Plug Part Number	IFR7F-4D				Full Open Temperature ⁹		°F	°C	159.8	71	
Standard Spark Plug Gap ¹⁰	in	mm	0.015	0.38	ECU Coolant Temp Warning		°F	°C	185	85	
Spark Plug Coil - Primary Resistance	Ohms		0.59Ω ± 10%		ECU Coolant Temp Shutdown		°F	°C	219.2	104	
Battery Voltage	Volts		24		50°C Ambient Capable ¹¹		Pass				
Starter Motor Power	HP	kW	9.4	7.0	Max External Coolant Friction Head		psi	kPa	6	40	
					CAC Rise Above Ambient Specified		°F	°C	48.2	9	

Performance Data 60Hz^{3,5}

Nominal Engine Speed	RPM		1800	
Mean Piston Speed	ft/min	m/s	1677	8.5
RPM Range (Min-Max) ISO 8528-5 G1	RPM		1778-1823	
Charging Alternator Voltage	Volts		24	
Charging Alternator Current	Amps		45	
Water Pump Speed	RPM		3056	
Total Engine Coolant Flow	gal/min	L/min	151	570
Cooling Fan Power ¹¹	HP	kW	42	31
Cooling Fan Speed	RPM		1440	
Cooling Fan Air Flow ¹¹	SCFM	m ³ /min	39995	1133.0

Performance Data 50Hz^{3,5}

Nominal Engine Speed	RPM		1500	
Mean Piston Speed	ft/min	m/s	1397	7
RPM Range (Min-Max) ISO 8528-5 G1	RPM		1481-1519	
Charging Alternator Voltage	Volts		24	
Charging Alternator Current	Amps		45	
Water Pump Speed	RPM		2547	
Total Engine Coolant Flow	gal/min	L/min	125	474
Cooling Fan Power ¹¹	HP	kW	24	18
Cooling Fan Speed	RPM		1200	
Cooling Fan Air Flow ¹¹	SCFM	m ³ /min	34276	971

Standby			NG 60Hz H0		NG 60Hz		NG 50Hz		LP 60Hz		LP 50Hz	
Power Rating ^{1,2,3,4} Per ISO 3046	HP	kWm	764	570	684	510	507	378	472	352	370	276
MEP (@ rated Load on NG)	psi	bar	252	17.4	225	15.5	200	13.8	155	10.7	146	10.1
Fuel Consumption ^{3,4,7}	lb/hr	kg/hr	258	117	232	106	167	76	177	81	135	62
BSFC	lb/(hp-hr)	g/(kW-hr)	0.338	206	0.340	207	0.330	201	0.376	229	0.366	223
Turbine Outlet Temperature	°F	°C	1244	674	1136	614	1019	548	998	537	1018	548
Exhaust Mass Flow (entire engine)	lb/hr	kg/hr	4525	2057	4076	1853	2925	1329	2750	1250	2041	928
Exhaust Flow at Turbine Outlet Conditions	ACFM	m ³ /min	2870	81	2426	69	1613	46	1494	42	1124	32
Air Induction System⁵												
Combustion Air required (entire engine)	lb/hr	kg/hr	4272	1942	3843	1747	2758	1254	2750	1250	2049	932
Combustion Air Volume Required (entire engine)	ACFM	m ³ /min	884	25	795	23	571	16	569	16	424	12
Compressor Outlet Temperature ²	°F	°C	395	202	362	183	282	139	279	137	231	110

¹ Standby and overload ratings based on ISO 3046 gross flywheel power.

² Technical data based on ISO 3046-1 standards of 77°F(25°C), absolute pressure 14.5Psi(100kPa) and 30% relative humidity.

³ Production tolerances in engines and installed components can account for power variations of ± 5%. Altitude, temperature and excessive exhaust and intake restrictions should be applied to power calculations.

⁴ All fuel and thermal calculations unless otherwise noted are done at ISO 3046 rated load using LHV for NG of 48.17 MJ/kg.

⁵ All values in the following section are provided for informational purpose only and are non-binding.

⁶ >1400RPM.

⁷ See PSI Energy Technical Spec. 56300019 - Fuel Standard.

⁸ Standard Sump Capacity.

⁹ ± 2 degrees Celsius.

¹⁰ ± 0.002" or 0.05mm.

¹¹ At 1" Static H₂O Pressure and 125F @ radiator

21.9L



ENERGY

[Stoic.]	
561000xx	Rev: PRELIM

General Engine Data⁵

Type	V-type 4 cycle				Flywheel housing	SAE No.1				
Number of cylinders	12				Flywheel	No. 14				
Aspiration	Turbo Charge Air Cooled				Dry Weight (Fan to Flywheel)	lb	kg	3630	1650	
Firing Order	1-12-5-8-3-10-6-7-2-11-4-9				Wet Weight (Fan to Flywheel)	lb	kg	5227	2376	
Rotation Viewed from Flywheel	Counter Clockwise				CG From Flywheel Housing Rear Face	in	mm	23.7	602	
Bore	in	mm	5.0	128	CG Above Crank Centerline	in	mm	7.2	182	
Stroke	in	mm	5.6	142	Max Bending Moment @ Rear of Block	lb/ft	N m	8130	6000	
Displacement	in ³	L	1336	21.9	Oil Specification	SAE 15W-40 Low Ash Gas engine oil (.25-.5% by wt), API CD/CF or higher				
Compression Ratio	10.5									
Exhaust Manifold Type	Water Cooled Manifold				Engine Oil Capacity ⁸	Min	qts	L	35.0	33.0
Turbo Exhaust Outlet Pipe Size	in	mm	2.5	65		Max	qts	L	42.4	40.0
Catalyst Inlet Size	in	mm	3.5	89	ECU Oil Pressure Warning ⁶		psi	kPa	30	207
Catalyst Dp	in-H ₂ O	kPa	33.4	8.3	ECU Oil Pressure Shut Down ⁶		psi	kPa	25	172
Maximum Allowable Exhaust Back Pressure	in-Hg	kPa	3.0	10.2	Oil Pressure at 1000 rpm (Idle)	Min	psi	kPa	13	90
Maximum Fuel System Pressure	psi	kPag	1.0	6.9		Max	psi	kPa	44	300
Maximum Operating pressure to EPR	in-H ₂ O	kPa	11.0	2.7	Max Allowable Oil Temperature		°F	°C	250	121
Minimum Operating pressure to EPR	in-H ₂ O	kPa	7.0	1.7	Coolant Capacity (Engine only)		gal	L	11.6	44
Minimum Gas Supply Pipe Size ⁵	2 x 2" NPT				Coolant Capacity (Radiator only)		gal	L	38.6	146
Maximum Pressure Drop Across CAC	psi	kPa	1.5	10.5	Radiator Weight (Dry)		lb	kg	1597	726
Maximum Allowable Intake Restriction	Clean Air Filter	in-H ₂ O	kPa	5.0	Standard Thermostat Range					
	Dirty Air Filter	in-H ₂ O	kPa	15.0	Normal Operation Temperature ⁹		°F	°C	159.8	71
Spark Plug Part Number	IFR7F-4D				Full Open Temperature ⁹		°F	°C	185	85
Standard Spark Plug Gap ¹⁰	in	mm	0.015	0.38	ECU Coolant Temp Warning		°F	°C	219.2	104
Spark Plug Coil - Primary Resistance	Ohms		0.59Ω ± 10%		ECU Coolant Temp Shutdown		°F	°C	230	110
Battery Voltage	Volts		24		50°C Ambient Capable ¹¹		Pass			
Starter Motor Power	HP	kW	9.4	7.0	Max External Coolant Friction Head		psi	kPa	6	40
					CAC Rise Above Ambient Specified		°F	°C	48.2	9

Performance Data 60Hz^{3,5}

Nominal Engine Speed	RPM		1800	
Mean Piston Speed	ft/min	m/s	1677	8.5
RPM Range (Min-Max) ISO 8528-5 G1	RPM		1778-1823	
Charging Alternator Voltage	Volts		24	
Charging Alternator Current	Amps		45	
Water Pump Speed	RPM		3056	
Total Engine Coolant Flow	gal/min	L/min	151	570
Cooling Fan Power ¹¹	HP	kW	42	31
Cooling Fan Speed	RPM		1440	
Cooling Fan Air Flow ¹¹	SCFM	m ³ /min	39995	1133.0

Performance Data 50Hz^{3,5}

Nominal Engine Speed	RPM		1500	
Mean Piston Speed	ft/min	m/s	1397	7
RPM Range (Min-Max) ISO 8528-5 G1	RPM		1481-1519	
Charging Alternator Voltage	Volts		24	
Charging Alternator Current	Amps		45	
Water Pump Speed	RPM		2547	
Total Engine Coolant Flow	gal/min	L/min	125	474
Cooling Fan Power ¹¹	HP	kW	24	18
Cooling Fan Speed	RPM		1200	
Cooling Fan Air Flow ¹¹	SCFM	m ³ /min	34276	971

Prime			NG 60Hz		NG 50Hz		LP 60Hz		LP 50Hz	
Power Rating ^{1,2,3,4} Per ISO 3046	HP	kWm	582	434	456	340	401	299	333	248
MEP (@ rated Load on NG)	psi	bar	192	13.2	180	12.4	132	9.1	131	9.1
Fuel Consumption ^{3,4,7}	lb/hr	kg/hr	200	91	151	69	153	69	122	56
BSFC	lb/(hp-hr)	g/(kW-hr)	0.343	209	0.331	202	0.381	232	0.368	224
Turbine Outlet Temperature	°F	°C	1053	567	1005	541	1015	546	1016	547
Exhaust Mass Flow (entire engine)	lb/hr	kg/hr	3507	1594	2640	1200	2369	1077	1840	836
Exhaust Flow at Turbine Outlet Conditions	ACFM	m ³ /min	1979	56	1442	41	1303	37	84	29
Air Induction System⁵										
Combustion Air required (entire engine)	lb/hr	kg/hr	3307	1503	2490	1132	2369	1077	1848	840
Combustion Air Volume Required (entire engine)	ACFM	m ³ /min	684	19	515	15	490	14	383	11
Compressor Outlet Temperature ²	°F	°C	319	160	261	127	249	121	215	102

¹ Standby and overload ratings based on ISO 3046 gross flywheel power.

² Technical data based on ISO 3046-1 standards of 77°F(25°C), absolute pressure 14.5Psia(100kPa) and 30% relative humidity.

³ Production tolerances in engines and installed components can account for power variations of ± 5%. Altitude, temperature and excessive exhaust and intake restrictions should be applied to power calculations.

⁴ All fuel and thermal calculations unless otherwise noted are done at ISO 3046 rated load using LHV for NG of 48.17 MJ/kg.

⁵ All values in the following section are provided for informational purpose only and are non-binding.

⁶ >1400RPM.

⁷ See PSI Energy Technical Spec. 56300019 - Fuel Standard.

⁸ Standard Sump Capacity.

⁹ ± 2 degrees Celsius.


¹⁰ ± 0.002" or 0.05mm.

¹¹ At 1" Static H2O Pressure and 125F @ radiator

STAMFORD®

HCI 534D/544D - Winding 311

Technical  Data Sheet

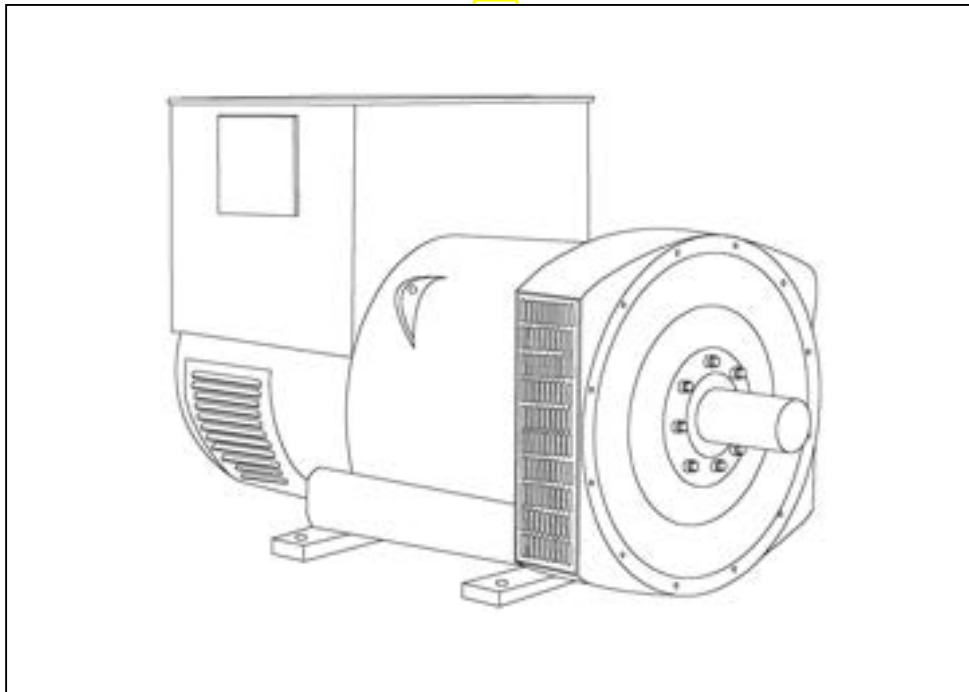

HC1534D/544D

SPECIFICATIONS & OPTIONS

STAMFORD

STANDARDS

Stamford industrial generators meet the requirements of BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2 100, AS1359.

Other standards and certifications can be considered on request.

VOLTAGE REGULATORS

AS440 AVR - STANDARD

With this self-excited system the main stator provides power via the Automatic Voltage Regulator (AVR) to the exciter stator. The high efficiency semi-conductors of the AVR ensure positive build-up from initial low levels of residual voltage.

The exciter rotor output is fed to the main rotor through a three-phase full-wave bridge rectifier. The rectifier is protected by a surge suppressor against surges caused, for example, by short circuit or out-of-phase paralleling.

The AS440 will support a range of electronic accessories, including a 'droop' Current Transformer (CT) to permit parallel operation with other ac generators.

MX341 AVR

This sophisticated AVR is incorporated into the Stamford Permanent Magnet Generator (PMG) control system.

The PMG provides power via the AVR to the main exciter, giving a source of constant excitation power independent of generator output. The main exciter output is then fed to the main rotor, through a full wave bridge, protected by a surge suppressor. The AVR has in-built protection against sustained over-excitation, caused by internal or external faults. This de-excites the machine after a minimum of 5 seconds.

An engine relief load acceptance feature can enable full load to be applied to the generator in a single step.

If three-phase sensing is required with the PMG system the MX321 AVR must be used.

We recommend three-phase sensing for applications with greatly unbalanced or highly non-linear loads.

MX321 AVR

The most sophisticated of all our AVRs combines all the features of the MX341 with, additionally, three-phase rms sensing, for improved regulation and performance.

Over voltage protection is built-in and short circuit current level adjustments is an optional facility.

WINDINGS & ELECTRICAL PERFORMANCE

All generator stators are wound to 2/3 pitch. This eliminates triplen (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches, when in parallel with the mains. A fully connected damper winding reduces oscillations during paralleling. This winding, with the 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.

TERMINALS & TERMINAL BOX

Standard generators are 3-phase reconnectable with 12 ends brought out to the terminals, which are mounted on a cover at the non-drive end of the generator. A sheet steel terminal box contains the AVR and provides ample space for the customers' wiring and gland arrangements. It has removable panels for easy access.

SHAFT & KEYS

All generator rotors are dynamically balanced to better than BS6861:Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.

INSULATION/IMPREGNATION

The insulation system is class 'H'.

All wound components are impregnated with materials and processes designed specifically to provide the high build required for static windings and the high mechanical strength required for rotating components.

QUALITY ASSURANCE

Generators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

The stated voltage regulation may not be maintained in the presence of certain radio transmitted signals. Any change in performance will fall within the limits of Criteria 'B' of EN 61000-6-2:2001. At no time will the steady-state voltage regulation exceed 2%.

DE RATES

All values tabulated on page 8 are subject to the following reductions

5% when air inlet filters are fitted.

3% for every 500 metres by which the operating altitude exceeds 1000 metres above mean sea level.

3% for every 5°C by which the operational ambient temperature exceeds 40°C.

Note: Requirement for operating in an ambient exceeding 60°C must be referred to the factory.

NB Continuous development of our products entitles us to change specification details without notice, therefore they must not be regarded as binding.

Front cover drawing typical of product range.

WINDING 311

CONTROL SYSTEM	SEPARATELY EXCITED BY P.M.G.		
A.V.R.	MX321	MX341	
VOLTAGE REGULATION	± 0.5 %	± 1.0 %	With 4% ENGINE GOVERNING
SUSTAINED SHORT CIRCUIT	REFER TO SHORT CIRCUIT DECREMENT CURVES (page 7)		

CONTROL SYSTEM	SELF EXCITED		
A.V.R.	AS440		
VOLTAGE REGULATION	± 1.0 %	With 4% ENGINE GOVERNING	
SUSTAINED SHORT CIRCUIT	SERIES 4 CONTROL DOES NOT SUSTAIN A SHORT CIRCUIT CURRENT		

INSULATION SYSTEM	CLASS H							
PROTECTION	IP23							
RATED POWER FACTOR	0.8							
STATOR WINDING	DOUBLE LAYER LAP							
WINDING PITCH	TWO THIRDS							
WINDING LEADS	12							
STATOR WDG. RESISTANCE	0.0049 Ohms PER PHASE AT 22°C SERIES STAR CONNECTED							
ROTOR WDG. RESISTANCE	1.77 Ohms at 22°C							
EXCITER STATOR RESISTANCE	17 Ohms at 22°C							
EXCITER ROTOR RESISTANCE	0.092 Ohms PER PHASE AT 22°C							
R.F.I. SUPPRESSION	BS EN 61000-6-2 & BS EN 61000-6-4,VDE 0875G, VDE 0875N. refer to factory for others							
WAVEFORM DISTORTION	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%							
MAXIMUM OVERSPEED	2250 Rev/Min							
BEARING DRIVE END	BALL. 6220 (ISO)							
BEARING NON-DRIVE END	BALL. 6314 (ISO)							
	1 BEARING				2 BEARING			
WEIGHT COMP. GENERATOR	1393 kg				1395 kg			
WEIGHT WOUND STATOR	657 kg				657 kg			
WEIGHT WOUND ROTOR	563 kg				535 kg			
WR² INERTIA	8.0068 kgm²				7.7289 kgm²			
SHIPPING WEIGHTS in a crate	1485 kg				1485 kg			
PACKING CRATE SIZE	166 x 87 x 124(cm)				166 x 87 x 124(cm)			
	50 Hz				60 Hz			
TELEPHONE INTERFERENCE	THF<2%				TIF<50			
COOLING AIR	1.035 m³/sec 2202 cfm				1.312 m³/sec 2780 cfm			
VOLTAGE SERIES STAR	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
VOLTAGE PARALLEL STAR	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
VOLTAGE SERIES DELTA	220/110	230/115	240/120	254/127	240/120	254/127	266/133	277/138
kVA BASE RATING FOR REACTANCE VALUES	500	550	500	500	575	594	625	644
Xd DIR. AXIS SYNCHRONOUS	3.02	2.99	2.53	2.25	3.52	3.25	3.13	2.96
X'd DIR. AXIS TRANSIENT	0.16	0.15	0.13	0.12	0.17	0.16	0.15	0.14
X''d DIR. AXIS SUBTRANSIENT	0.11	0.11	0.09	0.08	0.12	0.11	0.11	0.10
Xq QUAD. AXIS REACTANCE	2.48	2.46	2.08	1.85	2.87	2.65	2.55	2.41
X''q QUAD. AXIS SUBTRANSIENT	0.27	0.28	0.23	0.20	0.31	0.29	0.28	0.26
Xl LEAKAGE REACTANCE	0.05	0.04	0.04	0.04	0.06	0.06	0.05	0.05
X2 NEGATIVE SEQUENCE	0.19	0.19	0.16	0.14	0.22	0.20	0.20	0.19
XoZERO SEQUENCE	0.10	0.10	0.08	0.07	0.10	0.09	0.09	0.08
REACTANCES ARE SATURATED				VALUES ARE PER UNIT AT RATING AND VOLTAGE INDICATED				
T'd TRANSIENT TIME CONST.	0.08s							
T''d SUB-TRANSTIME CONST.	0.012s							
T'do O.C. FIELD TIME CONST.	2.2s							
Ta ARMATURE TIME CONST.	0.018s							
SHORT CIRCUIT RATIO	1/Xd							





**50
Hz**

HCI534D/544D

STAMFORD

Winding 311

THREE PHASE EFFICIENCY CURVES

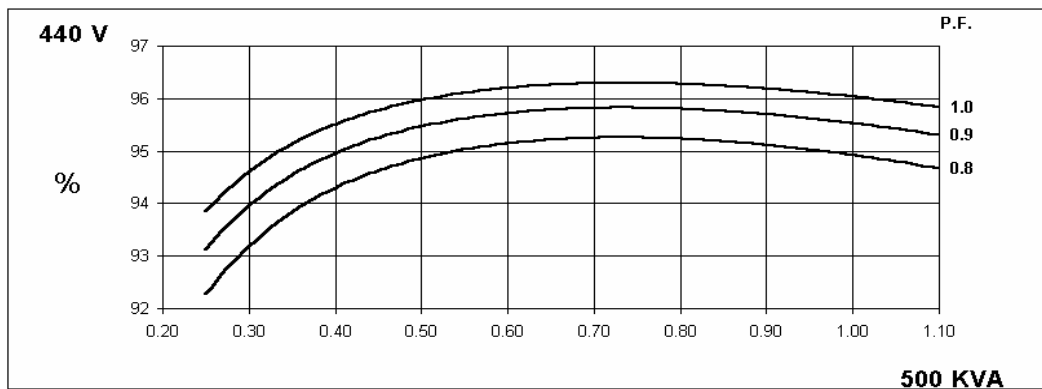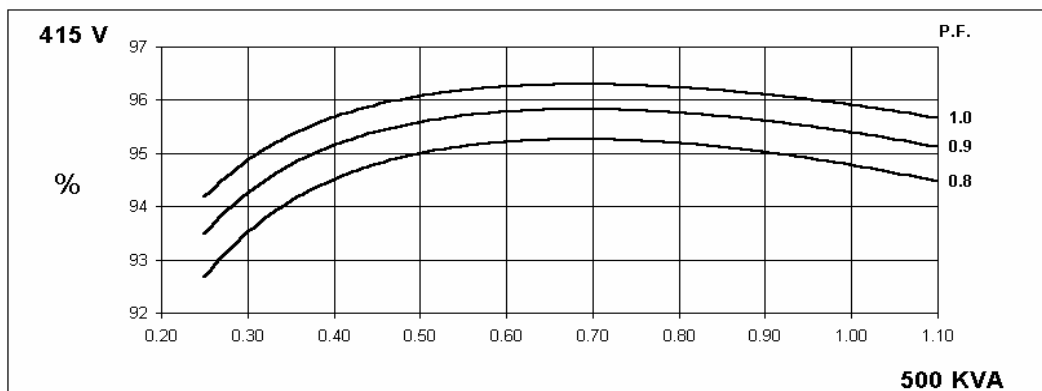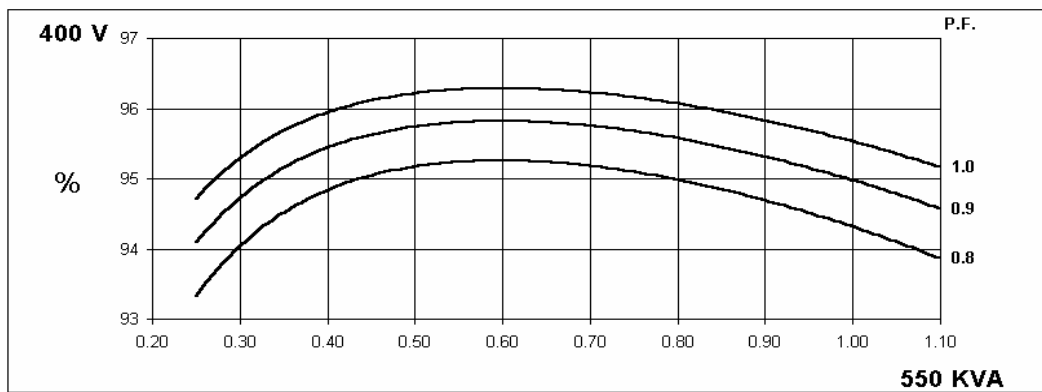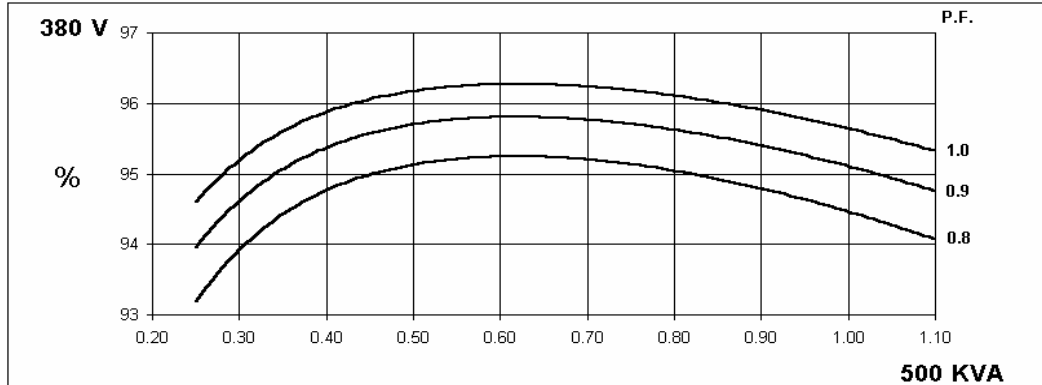





**60
Hz**

HCI534D/544D

STAMFORD

Winding 311

THREE PHASE EFFICIENCY CURVES

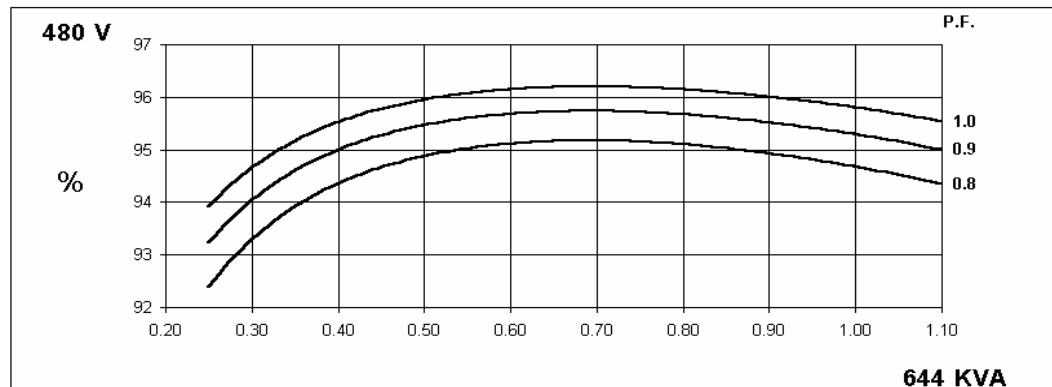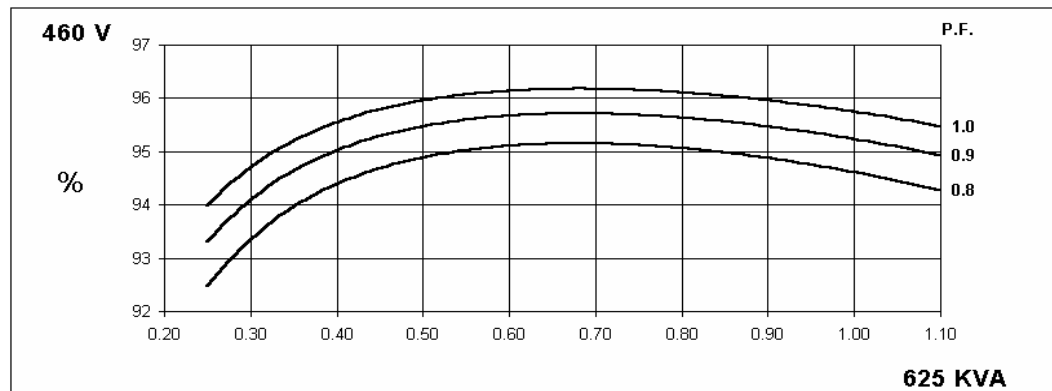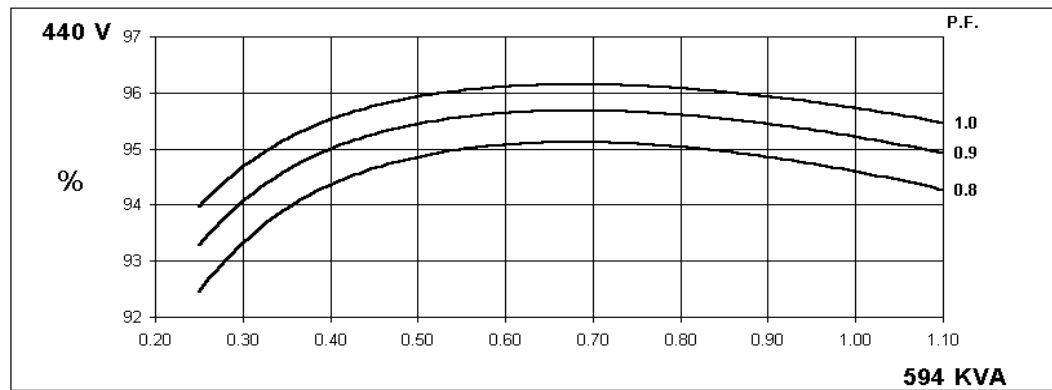
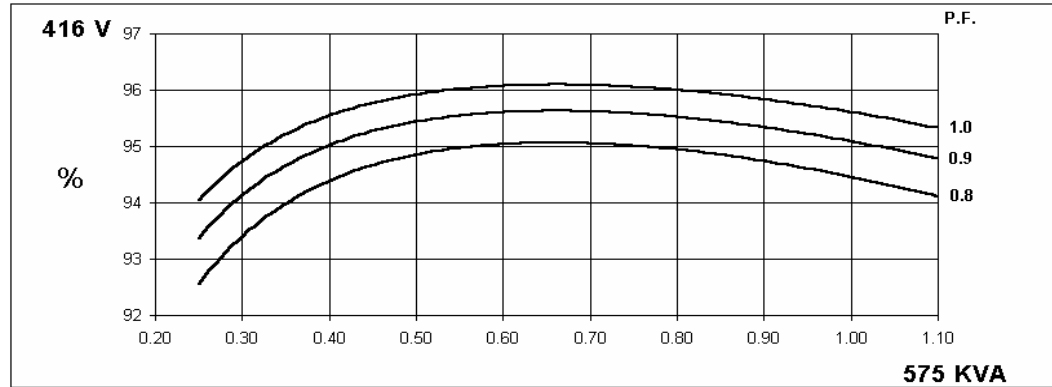


Locked Rotor Motor Starting Curve

50
Hz

MX



SX

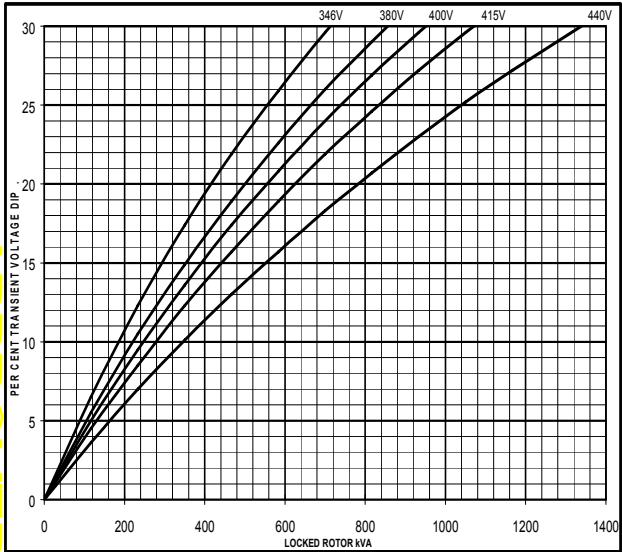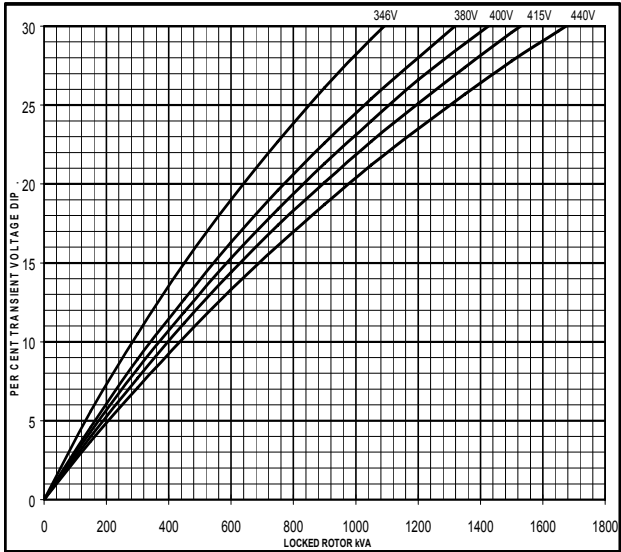

60
Hz


MX

SX

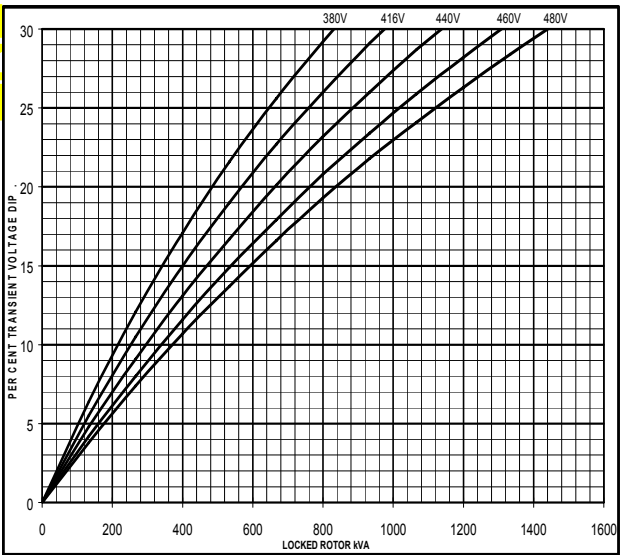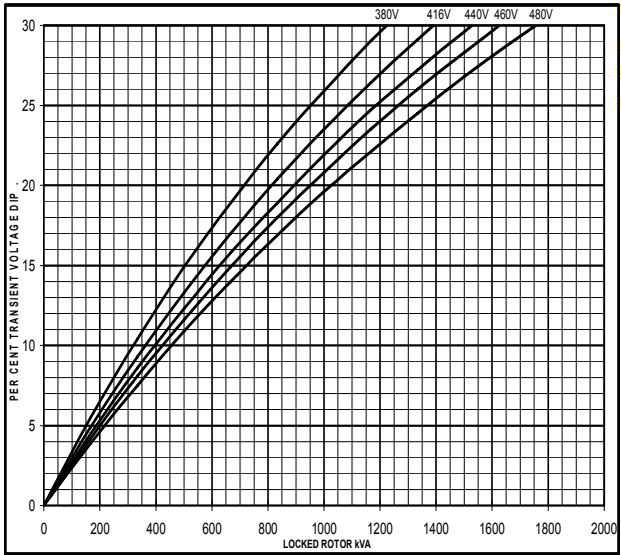

Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed
Based on star (wye) connection.


50
Hz

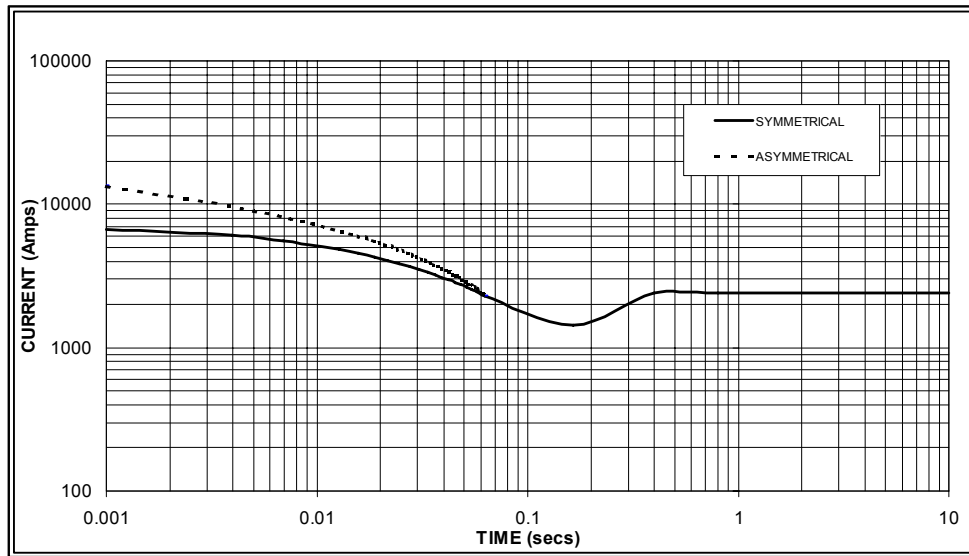

Sustained Short Circuit = 2,400 Amps



60
Hz

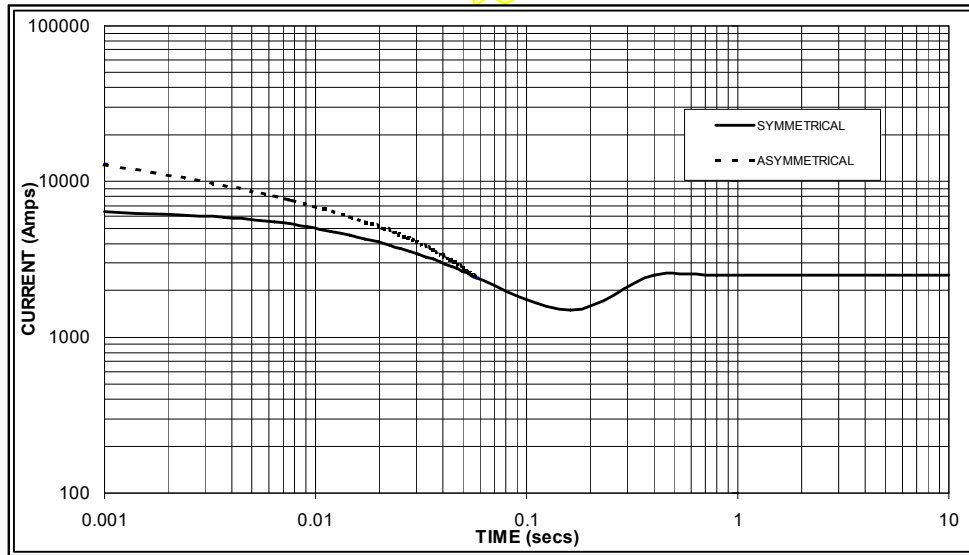

Sustained Short Circuit = 2,500 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	X 1.00	416v	X 1.00
400v	X 1.06	440v	X 1.06
415v	X 1.09	460v	X 1.12
440v	X 1.12	480v	X 1.20

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

Note 3

Curves are drawn for Star (Wye) connected machines. For other connections the following multipliers should be applied to current values as shown :

Parallel Star = Curve current value X 2

Series Delta = Curve current value X 1.732

HCI534D/544D

STAMFORD


Winding 311 0.8 Power Factor

RATINGS

Class - Temp Rise		Cont. F - 105/40°C				Cont. H - 125/40°C				Standby - 150/40°C				Standby - 163/27°C			
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	450	495	450	450	500	550	500	500	515	575	515	515	550	590	550	530
	kW	360	396	360	360	400	440	400	400	412	460	412	412	440	472	440	424
	Efficiency (%)	94.8	94.7	95.0	95.1	94.5	94.3	94.8	94.9	94.4	94.1	94.7	94.9	94.1	94.0	94.5	94.8
	kW Input	380	418	379	379	423	467	422	421	436	489	435	434	468	502	466	447

60 Hz	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	519	538	563	588	575	594	625	644	588	625	655	675	606	644	673	694
	kW	415	430	450	470	460	475	500	515	470	500	524	540	485	515	538	555
	Efficiency (%)	94.7	94.8	94.9	94.9	94.5	94.6	94.6	94.7	94.4	94.4	94.5	94.5	94.3	94.3	94.4	94.4
	kW Input	438	454	475	496	487	502	529	544	498	530	554	571	514	546	570	588

DIMENSIONS

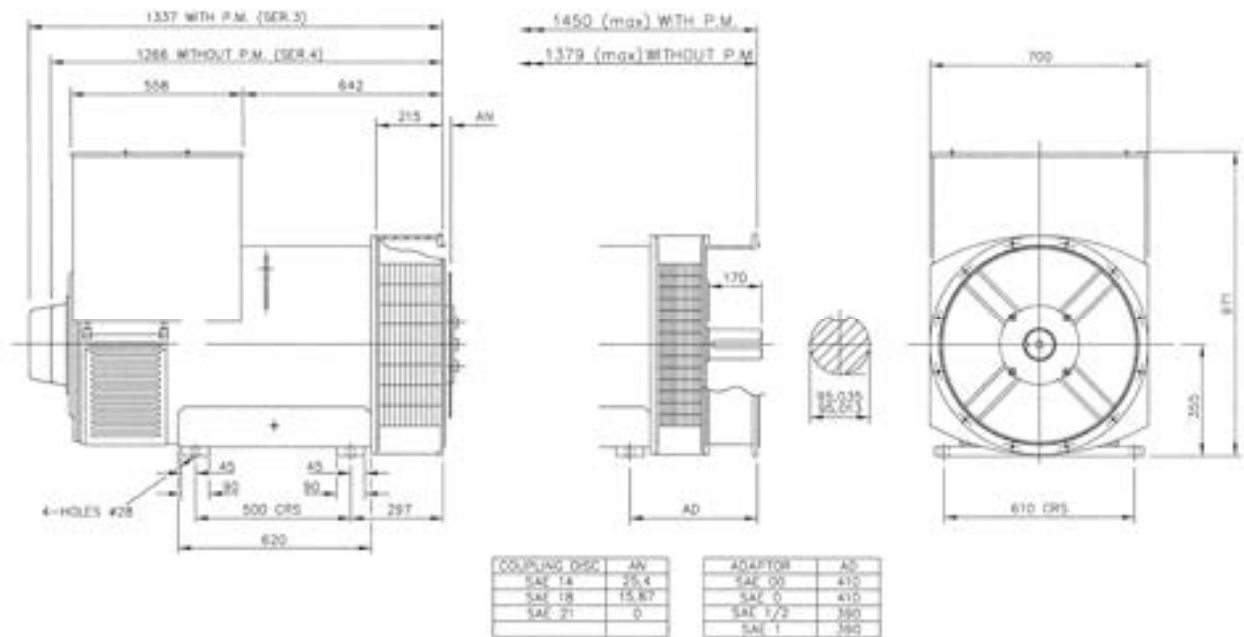



MX341 Technical Specification

- Sensing Input

1

- Power Input

- Power Output

Ω

- Regulation

1

- Thermal Drift

$^{\circ}\text{C}$

2

- Typical Response

- External Voltage Adjustment

3

- Under-Frequency Protection

4

- Unit Power Dissipation

- Analogue Input

5

- Input resistance 1 k Ω

- **Quadrature Droop Input**
 - 10 Ω burden
 - Maximum sensitivity: 0.07 A for 5% droop, zero power factor
 - Maximum input: 0.33 A
- **Over-Voltage Detection**
 - Set point: 75 VDC
 - Time delay: 10 s (fixed)
- **Environmental**
 - Vibration
 - 20 Hz to 100 Hz: 50 mm/sec
 - 100 Hz to 2 kHz: 3.3 g
 - Operating temperature: -40 °C to +70 °C
 - Relative Humidity 0 °C to 70 °C: 95%⁶
 - Storage temperature: -55 °C to +80 °C

¹ With 4% engine governing

² After 10 minutes

³ Applies to Mod status D onwards. Alternator de-rate may apply. Check with factory

⁴ Factory set, semi-sealed, jumper selectable.

⁵ Any device connected to the analogue input must be fully floating (galvanically isolated from ground), with an insulation strength of 500 VAC

⁶ Non condensing.

DSE7410/20

AUTO START & AUTO MAINS FAILURE MODULES

FEATURES

The DSE7410 is an Auto Start Control Module and the **DSE7420** is an Auto Mains (Utility) Failure Control Module suitable for a wide variety of single, diesel or gas, gen-set applications.

A sophisticated module monitoring an extensive number of engine parameters, the DSE74xx will announce warnings, shutdown and engine status information on the back-lit LCD screen, illuminated LED, remote PC, audible alarm and via SMS text alerts. The module includes RS232, RS485 & Ethernet ports as well as dedicated terminals for system expansion.

The DSE7400 Series modules are compatible with electronic (CAN) and non-electronic (magnetic pick-up/alternator sensing) engines and offer a comprehensive number of flexible inputs, outputs and extensive engine protections so the system can be easily adapted to meet the most demanding industry paralleling requirements.

The modules can be easily configured using the DSE Configuration Suite Software. Selected front panel editing is also available.

ENVIRONMENTAL TESTING STANDARDS

ELECTRO-MAGNETIC COMPATIBILITY

BS EN 61000-6-2
EMC Generic Immunity Standard for the Industrial Environment
BS EN 61000-6-4
EMC Generic Emission Standard for the Industrial Environment

ELECTRICAL SAFETY

BS EN 60950
Safety of Information Technology Equipment, including Electrical Business Equipment

TEMPERATURE

BS EN 60068-2-1
Ab/Ae Cold Test -30 °C
BS EN 60068-2-2
Bb/Be Dry Heat +70 °C

VIBRATION

BS EN 60068-2-6
Ten sweeps in each of three major axes
5 Hz to 8 Hz @ +/-7.5 mm,
8 Hz to 500 Hz @ 2 gn

HUMIDITY

BS EN 60068-2-30
Db Damp Heat Cyclic 20/55 °C @ 95% RH 48 Hours
BS EN 60068-2-78
Cab Damp Heat Static 40 °C @ 93% RH 48 Hours


SHOCK

BS EN 60068-2-27
Three shocks in each of three major axes
15 gn in 11 ms

DEGREES OF PROTECTION PROVIDED BY ENCLOSURES

BS EN 60529
IP65 - Front of module when installed into the control panel with the supplied sealing gasket.

COMPREHENSIVE FEATURE LIST TO SUIT A WIDE VARIETY OF GEN-SET APPLICATIONS

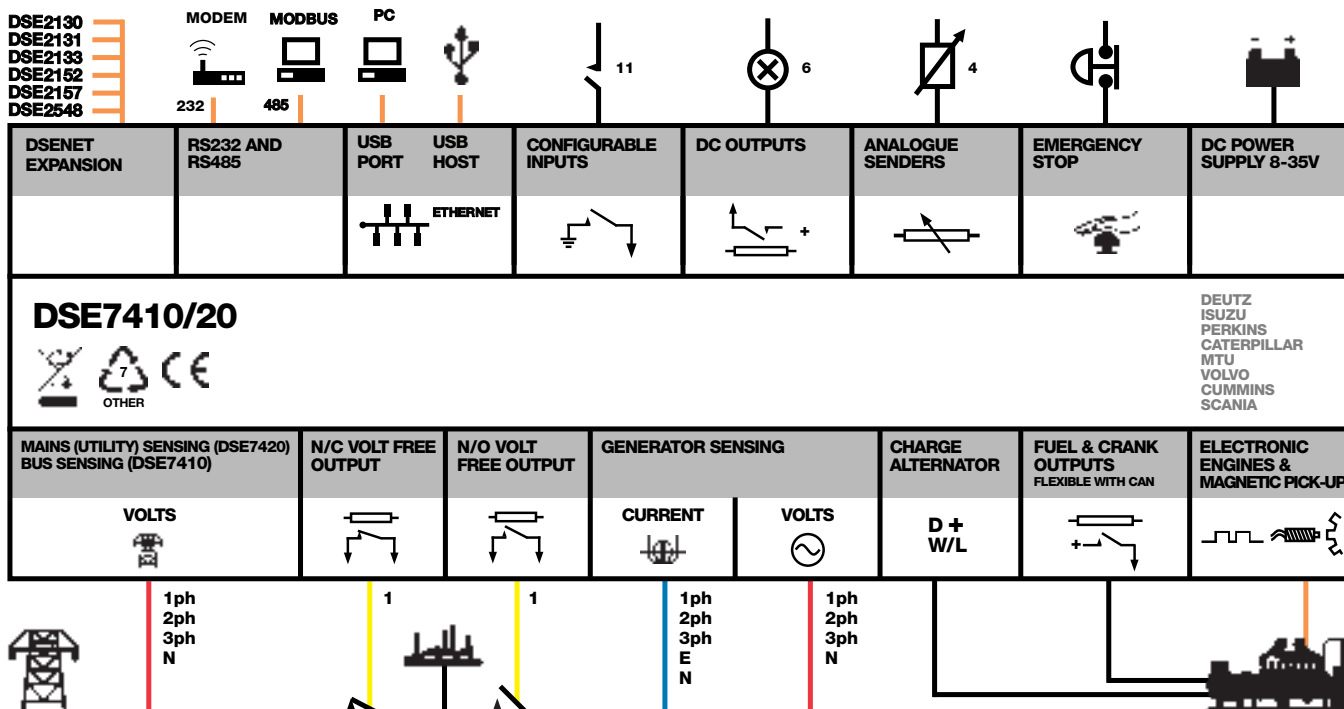

DSE7410/20

AUTO START & AUTO MAINS FAILURE MODULES

FEATURES



DSE7420

DSE7410



KEY FEATURES

- Configurable inputs (11)
- Configurable outputs (8)
- Voltage measurement
- Mains (utility) failure detection
- Dedicated load test button
- kW overload alarms
- Comprehensive electrical protection
- RS232, RS485 & Ethernet remote communications
- Modbus RTU/TCP
- PLC functionality
- Multi event exercise timer
- Back-lit LCD 4-line text display
- Multiple display languages
- Automatic start/Manual start
- Audible alarm
- Fixed and flexible LED indicators
- Event log (250)
- Engine protection
- Fault condition notification to a designated PC
- Front panel mounting
- Protected front panel programming
- Configurable alarms and timers
- Configurable start and stop timers

- Five key menu navigation
- Front panel editing with PIN protection
- 3 configurable maintenance alarms
- CAN and magnetic pick-up/Alt. sensing
- Fuel usage monitor and low fuel alarms
- Charge alternator failure alarm
- Manual speed control (on compatible CAN engines)
- Manual fuel pump control
- "Protections disabled" feature
- Reverse power protection
- Power monitoring (kW h, kV Ar, kV A h, kV Ar h)
- Load switching (load shedding and dummy load outputs)
- Automatic load transfer (DSE7420)
- Unbalanced load protection
- Independent earth fault trip
- Fully configurable via DSE Configuration Suite PC software
- Configurable display languages
- Remote SCADA monitoring via DSE Configuration Suite PC software

- Advanced SMS messaging (additional external modem required)
- Start & stop capability via SMS messaging
- Additional display screens to help with modem diagnostics
- DSENet® expansion
- Integral PLC editor

KEY BENEFITS

- RS232, RS485 & Ethernet can be used at the same time
- DSENet® connection for system expansion
- PLC functionality
- Five step dummy load support
- Five step load shedding support
- High number of inputs and outputs
- Worldwide language support
- Direct USB connection to PC
- Ethernet monitoring
- USB host
- Data logging & trending

RELATED MATERIALS

TITLE

DSE7410 Installation Instructions
DSE7420 Installation Instructions
 DSE74xx Quick Start Guide
 DSE74xx Operator Manual
 DSE74xx PC Configuration Suite Manual

PART NO'S

053-085
 053-088
 057-162
 057-161
 057-160

SPECIFICATION

DC SUPPLY

CONTINUOUS VOLTAGE RATING
 8 V to 35 V Continuous

CRANKING DROPOUTS

Able to survive 0 V for 50 mS, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries

MAXIMUM OPERATING CURRENT

260 mA at 12 V, 130 mA at 24 V

MAXIMUM STANDBY CURRENT

120 mA at 12 V, 65 mA at 24 V

CHARGE FAIL/EXCITATION RANGE

0 V to 35 V

OUTPUTS

OUTPUT A (FUEL)

15 A DC at supply voltage

OUTPUT B (START)

15 A DC at supply voltage

OUTPUTS C & D

8 A AC at 250 V AC (Volt free)

AUXILIARY OUTPUTS E,F,G,H,I & J

2 A DC at supply voltage

GENERATOR

VOLTAGE RANGE

15 V to 333 V AC (L-N)

FREQUENCY RANGE

3.5 Hz to 75 Hz

MAINS (UTILITY) (DSE7420)

VOLTAGE RANGE

15 V to 333 V AC (L-N)

FREQUENCY RANGE

3.5 Hz to 75 Hz

BUS (DSE7410)

VOLTAGE RANGE

15 V to 333 V AC (L-N)

FREQUENCY RANGE

3.5 Hz to 75 Hz

MAGNETIC PICK UP

VOLTAGE RANGE

+/- 0.5 V to 70 V

FREQUENCY RANGE

10,000 Hz (max)

DIMENSIONS

OVERALL

240 mm x 172 mm x 57 mm
 9.4" x 6.8" x 2.2"

PANEL CUTOUT

220 mm x 160 mm
 8.7" x 6.3"

MAXIMUM PANEL THICKNESS

8 mm
 0.3"

STORAGE TEMPERATURE RANGE

-40 °C to +85 °C

DEEP SEA ELECTRONICS PLC UK

Highfield House, Hunmanby Industrial Estate, Hunmanby YO14 0PH
TELEPHONE +44 (0) 1723 890099 **FACSIMILE** +44 (0) 1723 893303
EMAIL sales@deepseapl.com **WEBSITE** www.deepseapl.com

DEEP SEA ELECTRONICS INC USA

3230 Williams Avenue, Rockford, IL 61101-2668 USA
TELEPHONE +1 (815) 316 8706 **FACSIMILE** +1 (815) 316 8708
EMAIL sales@deepseausa.com **WEBSITE** www.deepseausa.com

Molded Case Circuit Breakers
Power Defense™ UL Global Series
Part Number: PDG43G0800B2NJNNNNNN



Datasheet creation date: 20/11/2019

PRODUCT VIEW *(Use Mouse to Rotate and Zoom)*

Eaton's Power Defense™ molded case circuit breakers, a globally rated platform designed to help keep your power system safe with latest protection technology. Engineered for the future: IoT and Industry 4.0 features such as built-in communications, advanced energy metering, and algorithms that signal breaker maintenance; zone selective interlock technology that clears faults quickly and locally; ArcFlash reduction options that help protect your people, and not to mention Eaton's best-in-class support and service.

Tech Data for Configured Product



Power Defense Catalog Number	PDG43G0800B2NJNNNNNN
Frame Size	Frame 4
Poles	3 Pole
Voltage	240V AC
Interruption or Breaking Capacity (Icu/Ics)	55kA
Continuous Current Rating (In)	800A
Trip Unit Type	PXR10
Trip Unit Options 1	LSI
Trip Unit Options 2	None
Indicating Accessories	None
Indicating Accessories Terminal	None
Tripping Accessories	None
Tripping Accessory Terminal	None
Tripping Accessory Voltage	None
Line Type Description	Option 1 - Standard Terminal
Line Conductor Options	(3) 3/0 - 400
Line Terminal Type	Aluminum
Load Type Description	Option 1 - Standard Terminal
Load Conductor Options	(3) 3/0 - 400
Load Terminal Type	Aluminum
Special Options - Type of Modification	None
Details	None
Additional Description	None

Molded Case Circuit Breakers
Power Defense™ UL Global Series
Part Number: PDG43G0800B2NJNNNNNN



Datasheet creation date: 20/11/2019

Technical drawings

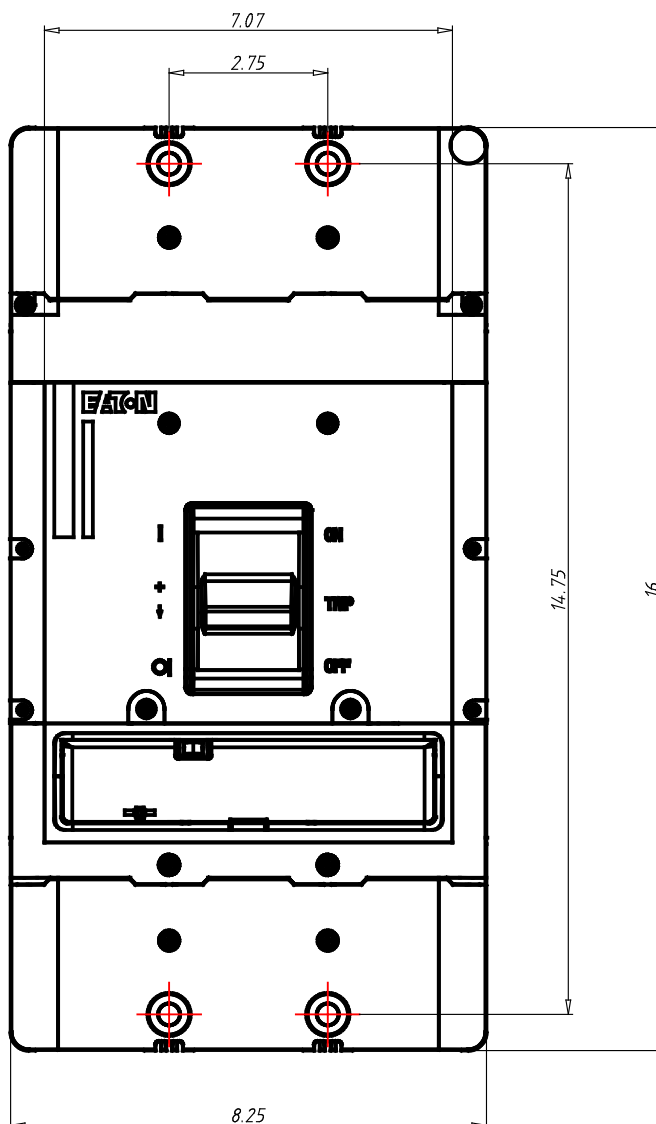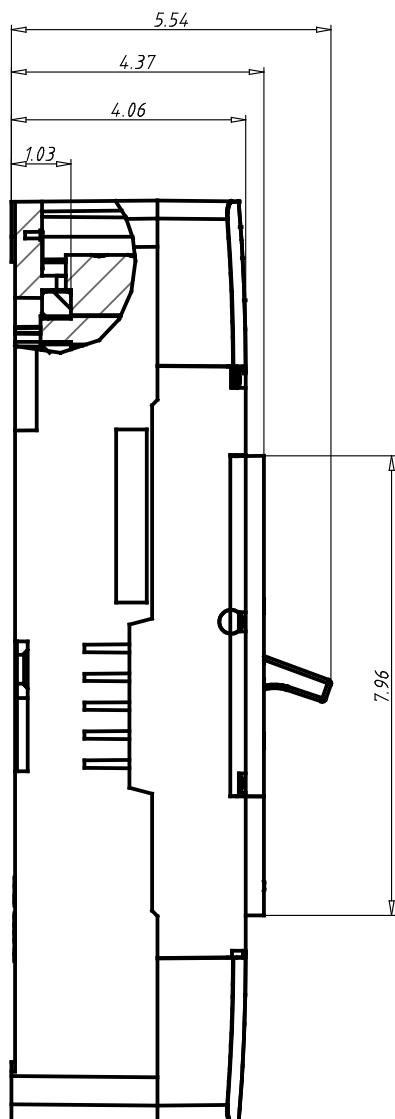

Molded Case Circuit Breakers
Power Defense™ UL Global Series
Part Number: PDG43G0800B2NJNNNNNN



Datasheet creation date: 20/11/2019

General Technical Data

Frame Rating (In)	800A
Reference Standard	UL489, CSA 22.2, IEC 60947-2 & GB
Number of poles	3
Neutral rating	-
Interruption Rating Designator	G / K / M
UL Interruption Rating to UL 489 (240Vac)	65 / 85 / 100kA
UL Interruption Rating to UL 489 (480Vac)	35 / 50 / 65(a)kA
UL Interruption Rating to UL 489 (600Vac)	18 / 25 / 35kA
UL Interruption Rating to UL 489 (125/250Vdc)	
UL Current Limiting	-
Rated breaking capacity to IEC 60947-2 (220-240 Vac Icu)	55 / 85 / 100 / 100kA
Rated breaking capacity to IEC 60947-2 (220-240 Vac Ics)	55 / 85 / 100 / 100kA
Rated breaking capacity to IEC 60947-2 (380-415 Vac Icu)	36 / 50 / 70 / 70kA
Rated breaking capacity to IEC 60947-2 (380-415 Vac Ics)	36 / 50 / 53 / 70kA
Rated breaking capacity to IEC 60947-2 (440 Vac Icu)	30 / 35 / 50 / 65kA
Rated breaking capacity to IEC 60947-2 (440 Vac Ics)	22.5 / 35 / 40 / 50kA
Rated breaking capacity to IEC 60947-2 (525 Vac Icu)	20 / 25 / 30 / 35kA
Rated breaking capacity to IEC 60947-2 (525 Vac Ics)	16.5 / 20 / 25 / 25kA
Rated breaking capacity to IEC 60947-2 (690 Vac Icu)	8 / 10 / 15 / 20kA
Rated breaking capacity to IEC 60947-2 (690 Vac Ics)	4 / 5 / 7.5 / 10kA
Rated breaking capacity to IEC 60947-2 (125V DC Icu)	
Rated breaking capacity to IEC 60947-2 (250V DC 2P in series Ics)	22 / 22 / 25kA
Frequency	50/60Hz
Trip Unit Type	PXR10
Continuous Current Range	320 - 800A
100% UL489 Rated	Yes
Instantaneous/Short Circuit Range	2 - 8 In
Magnetic/Instantaneous Override	6800A
Dimensions H x W x D (inches)	16 x 8.25 x 4.38
Pole to pole distance inches	2,75
Approx Weight lbs	29,98
RoHS Compliance	Yes
UL File Number	E7819
Ambient Temp Calibration	
Derating at 50C	
Derating at 60C	
Derating at 70C	

1. 480Vac corresponds to 277Vac for 1P
2. 600Vac corresponds to 347Vac for 1P



GILLETTE GENERATORS

**STANDARD
BATTERY CHARGER
24V SYSTEM**



Description:

2 bank, 10 amp, 12/24V DC output charger with wide input voltage range (100-240V AC), is microprocessor controlled and has a maintenance mode that will keep the battery fully charged. Meets the CEC (California Energy Commission), DOE, FCC, CE, is RoHS compliant and has UL and CSA listings (cULus).

Electrical Characteristics:

Battery size: Group 24 through 31 (up to 120 Amp-Hr)

Battery Type: 12V lead acid (FLOODED and AGM)

Maximum Recharger time: 12 hours

Input Voltage Range: 100 to 240V AC 50/60 HZ

Input Current rating: 2.5 Amps maximum

Height 5.5 inches
14.0 cm

Width 7.8 inches
19.7 cm

Depth 2.4 inches
6.2 cm

Additional Details

Soft Start - "Soft Start" slowly charges the battery with 14.25V (10% of rated current). As soon as the max Soft Start timer (starts immediately when entering "Soft Start") of 6 hours is reached or when the battery reaches 10V for 30 seconds the charger switches to the "Bulk stage".

Bulk - "Bulk" charges the battery with 14.3V (100% of rated current) until the battery reaches 13.25V. As soon as the battery reaches 13.25V the Bulk timer will start counting after which it can charge the battery up to 12 hours until the voltage reaches 14.25V. As soon as the max Bulk timer

(starts when voltage level is above 13.25V while in "Bulk") of 12 hours is reached or when the battery reaches 14.25V for 30 seconds the charger switches to the "Absorption stage".

Absorption - "Absorption" charges the battery with 14.25V. As soon as the Absorption timer (starts immediately when entering "Absorption") reaches 14 hours or when the charge current drops below 10% of the rated current for 30 seconds the charger switches to the "Float stage".

Float - "Float" keeps the charger on a specific voltage level of 13.25V (100% of rated current) for a period and then will switch to the "Maintenance stage"

Maintenance - As soon as the re-cycle timer reaches 14 days (336 hours) or when the voltage drops below 12.8V for 30 seconds the charger switches back to "Bulk stage"



GILLETTE GENERATORS

**S-13G240V
4000 WATT BLOCK
HEATER**



HEAVY DUTY HEATING

OEMs expect dependable heating for their engines. Hotstart's Thermosiphon Tank Heaters are the industry standard for consistent, reliable coolant heating for stationary power, equipment, marine and truck applications.



SAFE AND EASY OPERATION

Pressure die-cast aluminum tank construction means Hotstart heaters are built to last. Each unit includes a hi-limit safety thermostat rated for 205°F (95°C) ensuring safe operation day to day, year after year.



PRECISE HEATING CONTROL

Keeping critical fluids heated is key to easy engine starts regardless of ambient temperature. The CB, CL and WL heaters come with or without flow-through thermostats for precise heat control. The heaters can be configured with fixed or adjustable thermostats to best meet your heating needs.



EQUIPMENT MANUFACTURERS SOLUTION

The CB, CL and WL heaters are ideal for OEM specifications requiring a wide range of heat power and phase options that can be hard wired into existing power systems.

Description:

Hotstart's CB, CL and WL Thermosiphon heating systems are coolant preheaters developed to maintain optimal temperatures for diesel and gas engines in stationary land power, marine, construction equipment, and truck applications.

Electrical Characteristics:

AC Input, 240V SINGLE PHASE, 16.6 Amps, Ingress-NEMA 4, Min/Max ambient temp -4-104°F (-20-40°C)


Heat Power-4kW

Temp range ON: 80°F (20°C), OFF: 100°F (38°C)

Specification:

UL/C-US Listed, CE Compliant


Length: 23.5", Width: 6.2", Height: 5.8", Weight: 10lbs

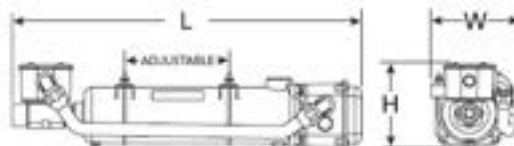



GILLETTE GENERATORS

**S-17BC
EMERGENCY STOP
SWITCH WITH CLEAR
PLASTIC COVER**

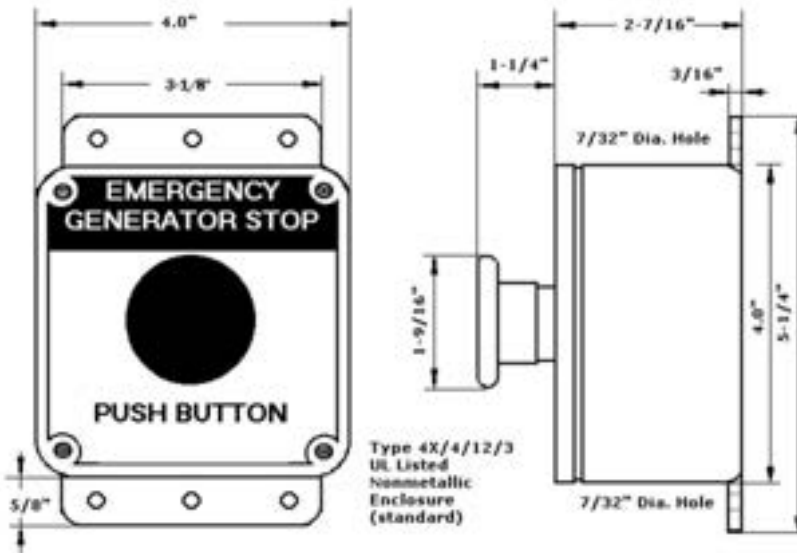

Description:

Yellow nonmetallic NEMA 4X enclosure. Accepts one to three contact blocks. Labeled EMERGENCY GENERATOR STOP and PUSH BUTTON. Red operator is labeled PULL TO RESET. Includes clear plastic cover installed.

Electrical Characteristics:

Contact blocks (normally closed)

Screw and captive clamp terminals. Min: 1 X 24 AWG Max: 2 X 16 AWG
600 Vac @ 1.2 Amp 250 Vdc at 0.27Amp 120 Vdc @ 0.55 Amp

Specification:

PUSH BUTTON EMERGENCY GENERATOR STOP P/N GS120 uses a single push button operating mode. Using a maintained (push-pull) red 40mm mushroom operator hot stamped PULL TO RESET on the mushroom face. The operating mode reverses the nominal state of the installed contact blocks such that type contact blocks remain open/closed when the operator is pressed or pulled to reset. Clear plastic cover is pad-lockable & installed to prevent accidental operation.



GILLETTE GENERATORS

SCIENCE DETAIL

SILENCER GRADE: CRITICAL GRADE

ATTENUATION: 30-35 dBA



SILENCER SHELL: STANDARD SHELL (NO INSULATION)

SILENCER TUBES: STANDARD TUBES (NO INSULATION)


CRITICAL SILENCER

TXS-10





400-500 KW GAS

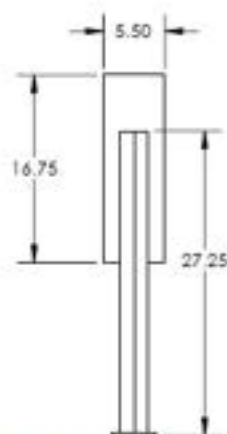

DETAIL VERTICAL MOUNTING LEG




DETAIL F-10
10" ANSI 150# FLANGE
0.50" THK

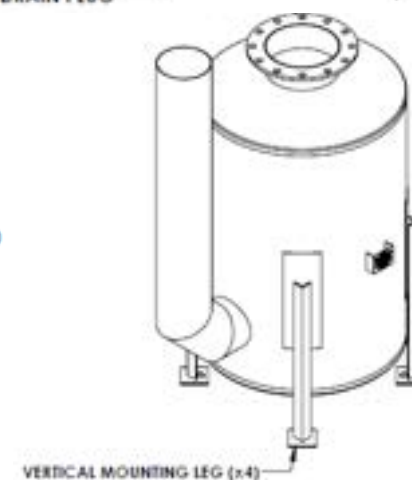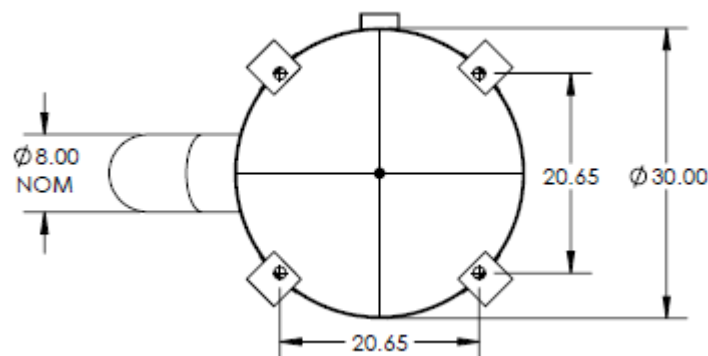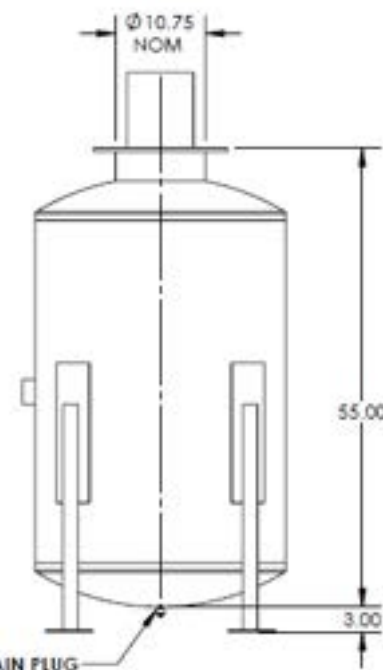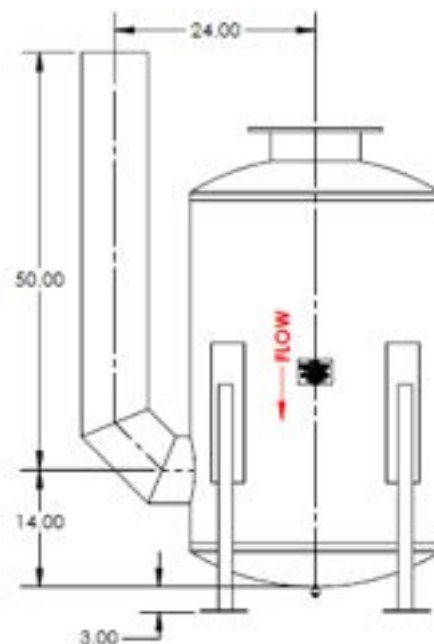


TOP VIEW


(GEN-SET HAS (6) DOORS, (3) SHOWN OPEN ARE TYPICAL FOR BOTH SIDES)

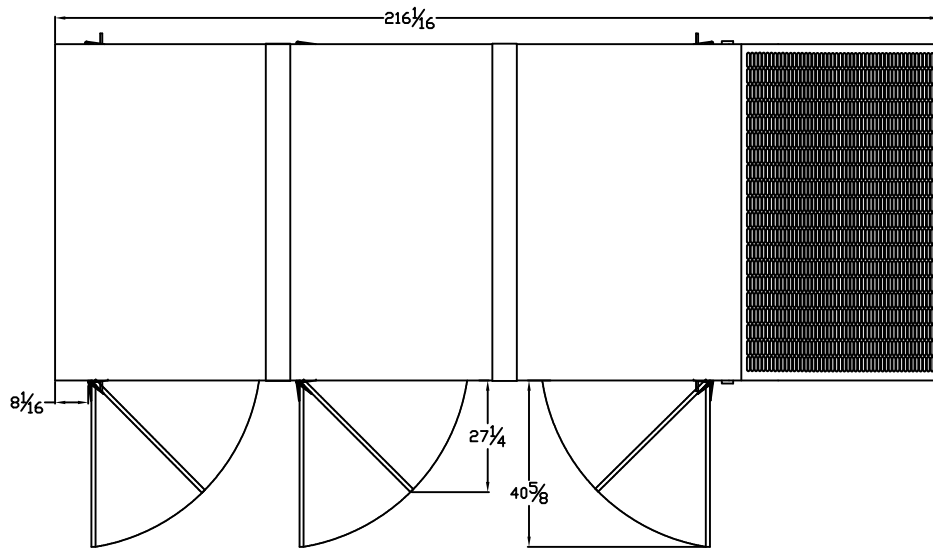


Technical drawing of the front view of a generator assembly. The drawing shows a rectangular frame with various components labeled: "B.C.", "BAT", "BAT", "GENERATOR RAIL", "ENGINE RAIL", and "RADIATOR RAIL". Dimensions are provided in inches, including overall width (216), overall height (82), and specific component widths and spacings. A note indicates "(10) MOUNTING SLOTS = 3/4\"W1 X 1-1/2\"LG".

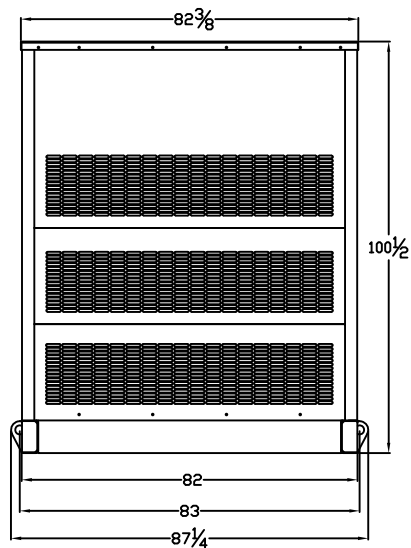

GENERATOR END VIEW

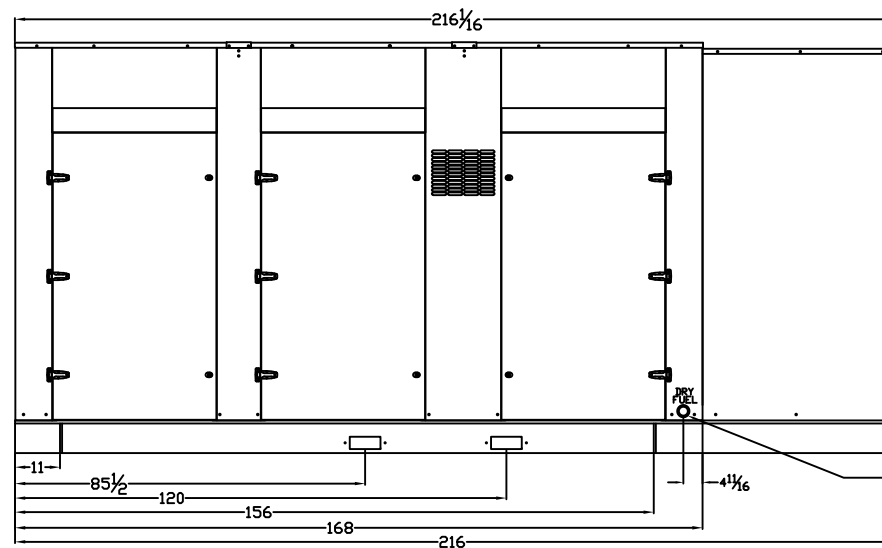

SIDE VIEW

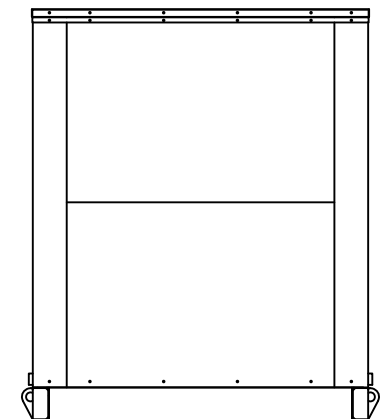

RADIATOR END VIEW

2" BP NPTF COUPLING
FOR DRY FUEL CONNECTION
LOCATED ON BOTH SIDES